


## Bend 45° (1/8) (PECB) with 2 sockets TYTON

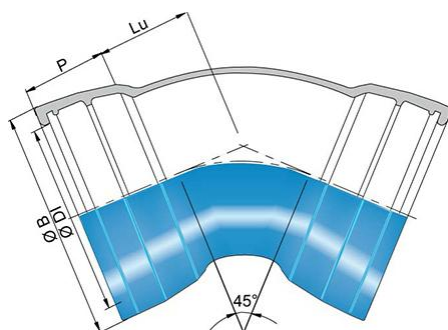

| Angle | DN (mm) | Lu (mm) | P (mm) | ØDI (mm) | ØB (mm) | Mass (kg) | References  |
|-------|---------|---------|--------|----------|---------|-----------|-------------|
| 45°   | 80      | 55      | 84     | 100,5    | 141     | 7,10      | 102851      |
| 45°   | 100     | 65      | 88     | 120,5    | 161     | 9,00      | SYB10CB00TT |
| 45°   | 125     | 75      | 91     | 146,5    | 188     | 12,30     | 102876      |
| 45°   | 150     | 85      | 94     | 172,5    | 215     | 16,00     | SYB15CB00TT |
| 45°   | 200     | 110     | 100    | 224,5    | 271     | 24,50     | SYB20CB00TT |
| 45°   | 250     | 130     | 105    | 276,5    | 324     | 35,50     | 101660      |
| 45°   | 300     | 155     | 110    | 328,5    | 381     | 48,50     | 102913      |

### Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009