


Bend 22°30 (1/16) (PECB) with 2 sockets TYTON

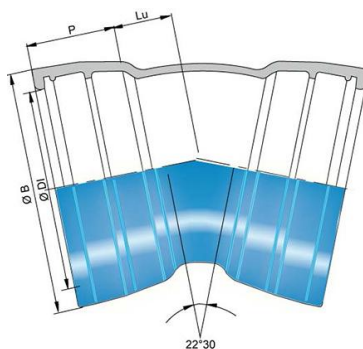

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	80	40	84	100,5	141	6,70	102873
22°30	100	45	88	120,5	161	8,10	SYB10CD00TT
22°30	125	50	91	146,5	188	11,20	102875
22°30	150	55	94	172,5	215	14,20	SYB15CD00TT
22°30	200	65	100	224,5	271	21,00	SYB20CD00TT
22°30	250	75	105	276,5	324	30,50	101659
22°30	300	90	110	328,5	381	40,50	102911

Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009