


Taper (PECB) with 2 sockets TYTON DN100-300

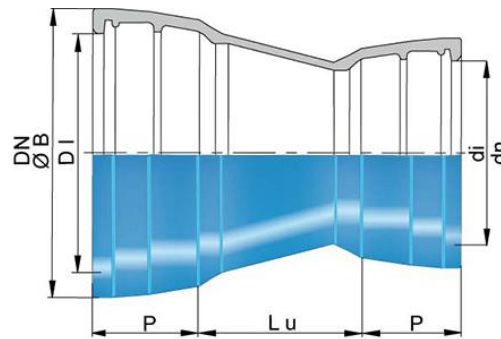

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	80	90	88	120,5	177	84	100,5	7,50	102833
125	80	140	91	146,5	208	84	100,5	9,90	*
125	100	100	91	146,5	208	88	120,5	10,00	103247
150	80	190	94	172,5	230	84	100,5	12,30	103033
150	100	150	94	172,5	230	88	120,5	12,30	102872
150	125	100	94	172,5	230	91	146,5	12,30	103541
200	80	280	100	224,5	290	84	100,5	21,80	*
200	100	250	100	224,5	290	88	120,5	18,30	103706
200	125	200	100	224,5	290	91	146,5	19,00	*
200	150	150	100	224,5	290	94	172,5	18,70	102971
250	100	300	105	276,5	347	88	120,5	27,80	*
250	125	300	105	276,5	347	91	147,4	30,10	*
250	150	250	105	276,5	347	94	172,5	32,00	*
250	200	150	105	276,5	347	100	224,5	25,50	103180
300	150	350	110	328,5	406	94	172,5	35,50	*
300	200	250	110	328,5	406	100	224,5	35,50	123587
300	250	150	110	328,5	406	105	276,5	34,50	103174

(*) please contact us

Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009