


Bend 22°30 (1/16) (PECB) with 2 Fixed Flanges

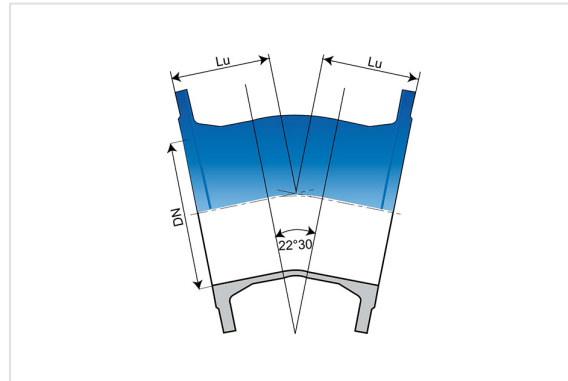

Angle	DN	Lu (mm)	PN 10		PN 16		PN 25		PN 40	
			Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
22°30	80	100	11.00	BBA80CD10TT	11.00	BBA80CD10TT	11.00	BBA80CD10TT	11.00	BBA80CD10TT
22°30	100	110	11.00	BBB10CD10TT	11.00	BBB10CD10TT	18.00	BBB10CD30TT	18.00	BBB10CD30TT
22°30	150	109	16.50	BBB15CD10TT	16.50	BBB15CD10TT	21.50	BBB15CD30TT	21.50	BBB15CD30TT
22°30	200	138	41.00	BBB20CD10TT	41.00	BBB20CD20TT	30.00	BBB20CD30TT		
22°30	250	190	47.50	BBB25CD10TT	56.00	BBB25CD20TT	48.80	BBB25CD30TT		
22°30	300	210	73.00	BBB30CD10TT	73.00	BBB30CD20TT	69.50	BBB30CD30TT		
22°30	350	210			83.00	BBB35CD20TT	91.50	BBB35CD30TT		
22°30	400	239	98.50	BBB40CD10TT	107.00	BBB40CD20TT	131.00	BBB40CD30TT		
22°30	450	349			135.00	BBB45CD20TT				
22°30	500	375			210.00	BBB50CD20TT	199.40	BBB50CD30TT		
22°30	600	426	219.00	BBB60CD10TT	267.00	BBB60CD20TT				
22°30	700	300	261.00	BBB70CD10TT	258.00	BBB70CD20TT	334.00	BBB70CD30TT		
22°30	800	335	340.00	BBB80CD10TT	336.00	BBB80CD20TT				
22°30	900	375	442.00	BBB90CD10TT	437.00	BBB90CD20TT	559.00	BBB90CD30TT		
22°30	1000	410	587.00	BBC10CD10TT	581.00	BBC10CD20TT	758.00	BBC10CD30TT		
22°30	1200	467.5	905.00	BBC12CD10TT	1018.00	BBC12CD20TT				
22°30	1400	524			1324.00	BBC14CD20TT				
22°30	1600	564			1836.00	BBC16CD20TT				
22°30	1800	600	2524.00	BBC18CD10TT						
22°30	2000	650	2840.00	BBC20CD10TT						

Field of use:

- For drinking water networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.