


## UNIVERSAL TYTON taper DN250-300

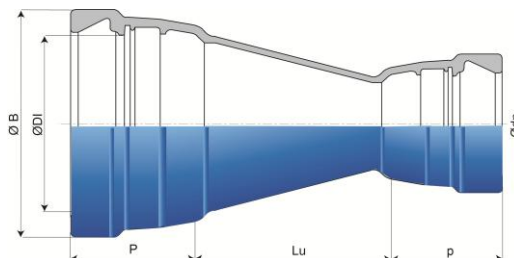

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
250	200	150	166	277.3	347	158	224.5	42.00	SKB25VE0KTT
300	250	150	178	328.5	406	166	276.5	57.30	SKB30VE0LTT

### Field of use:

- To use under high to very high pressures
- For connecting and water supply of snow guns

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531