


Bend with 1 sockets UNIVERSAL TYTON and 1 spigot-end

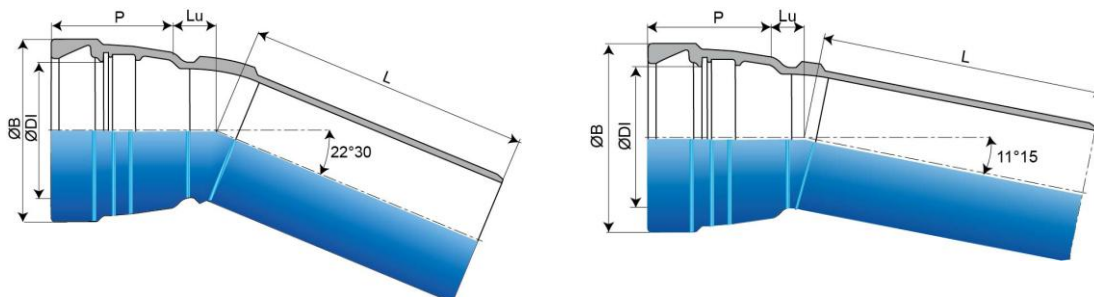

Angle	DN (mm)	Lu (mm)	L (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	80	40	340.2	137.2	101.5	160.6	11.60	SKA80DD00TT
11°15	80	30	330.2	137.2	101.5	160.6	14.10	SKA80DE00TT
22°30	100	40	313.3	143.3	121.5	177	13.80	SKB10DD00TT
11°15	100	30	303	143.3	121.5	177	13.40	SKB10DE00TT
22°30	125	50	349.1	142.7	147.5	201.4	18.10	SKB12DD00TT
11°15	125	35	334.1	142.7	147.5	201.4	17.40	SKB12DE00TT
22°30	150	45	349	148	173.5	230	21.80	SKB15DD00TT
11°15	150	35	339	148	173.5	230	22.90	SKB15DE00TT

Field of use:

- To use under high to very high pressures
- For connecting and water supply of snow guns

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531