



QUICK PVC e BLUTOP - Versão simples


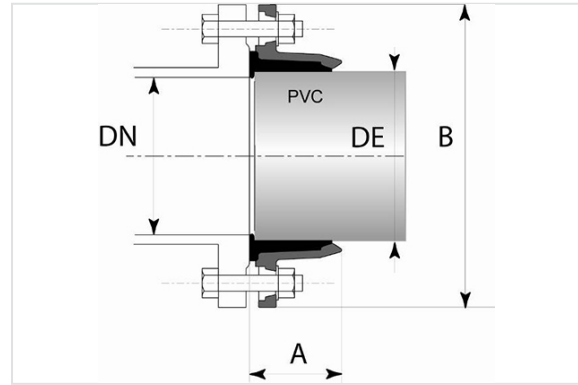


DN Flange (mm)	DN/OD (mm)	ØDE (mm)	A (mm)	B (mm)	Peso (kg)	Referência
40	40	40	50	150	1,20	MAL40DACH
40/50	50	50	53	165	1,50	MAL50DACH
50	63	63	54	165	1,80	MAL60DACH
60/65	63	63	54	185	2,00	MAL65DACH
60/65	75	75	58	185	2,30	MAL75DACH
80	90	90	62	200	2,60	MAL90DACH
100	110	110	68	220	3,08	160754
125	125	125	73	250	4,06	160755
125	140	140	76	250	4,08	160756
150	160	160	82	285	5,20	160757
200	200	200	91	340	7,50	160758
200	225	225	93	340	7,10	160759

Nota: Gama BLUTOP para DN75, 90, 110, 125, 140 e 160

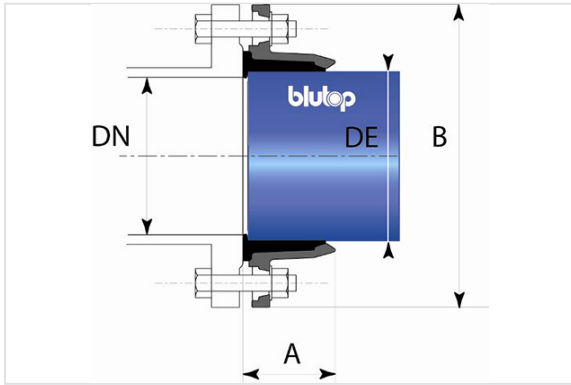

Material e revestimento

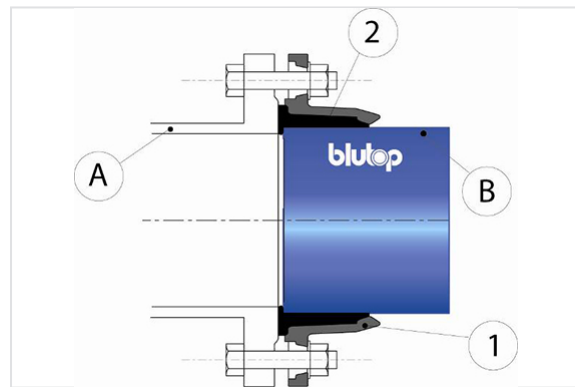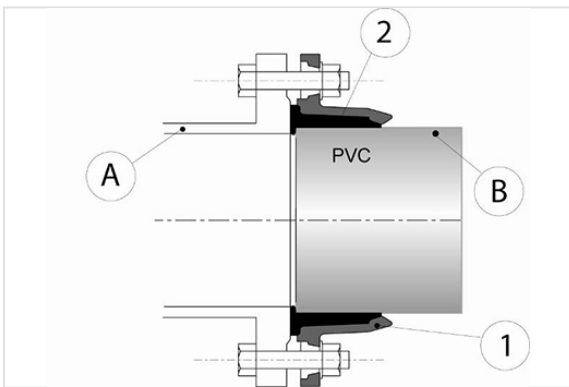

Item	Designação	Material	Revestimento
1	Contraflange	Ferro dúctil GS	Pó epóxi azul com espessura média de 250 microns e mínima de 200 microns, em conformidade com a norma EN 14901-1 (PECB)
2	Junta de estanqueidade	EPDM	
A	Válvula	Ferro dúctil	
B	Tubo	PVC ou ferro dúctil (BLUTOP)	

Marcação

