


Kit Rohr Standard PE-U + Standard Dichtung



DN	Klasse	Abwinkelbarkeit	PFA
80 mm	C40	5 °	40 bar
100 mm	C40	5 °	40 bar
125 mm	C40	5 °	40 bar
150 mm	C40	5 °	40 bar
200 mm	C40	5 °	40 bar
250 mm	C40	5 °	40 bar
300 mm	C40	5 °	40 bar
350 mm	C30	4 °	30 bar
400 mm	C30	4 °	30 bar
450 mm	C30	4 °	30 bar
500 mm	C30	4 °	30 bar
600 mm	C30	4 °	30 bar
700 mm	C25	4 °	25 bar
800 mm	C25	4 °	25 bar
900 mm	C25	4 °	25 bar
1000 mm	C25	4 °	25 bar

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN≥800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.

Produkte

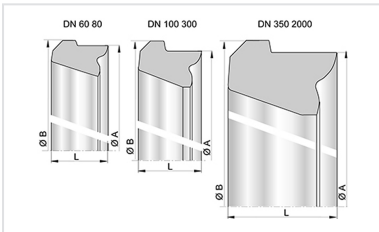

Dichtung Standard für
Rohre und Formstücke