


Kit Rohr Standard PE-U HP + Standard Dichtung



DN	Klasse	Abwinkelbarkeit	PFA
80 mm	C64	5 °	64 bar
100 mm	C64	5 °	64 bar
125 mm	C64	5 °	64 bar
150 mm	C64	5 °	64 bar
200 mm	C50	5 °	50 bar
250 mm	C50	5 °	50 bar
300 mm	C50	5 °	50 bar
350 mm	C40	4 °	40 bar
400 mm	C40	4 °	40 bar
450 mm	C40	4 °	40 bar
500 mm	C40	4 °	40 bar
600 mm	C40	4 °	40 bar

Produkte

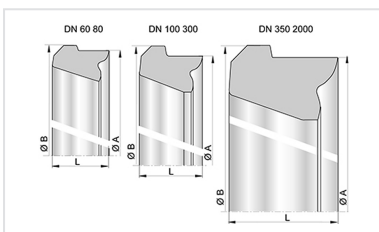

Dichtung Standard für
Rohre und Formstücke