



## Kit Rohr Standard PE-U + Standard Dichtung

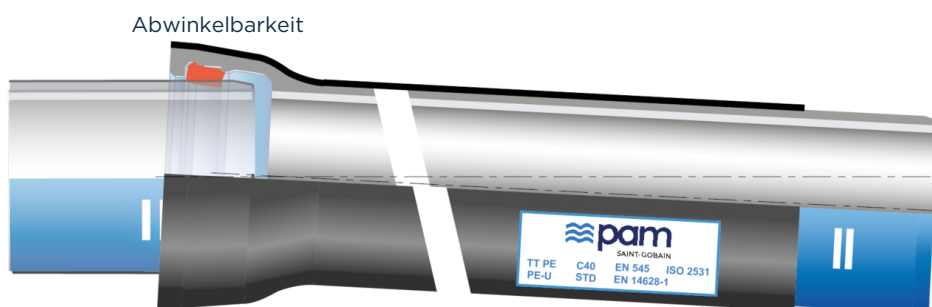

| DN      | Klasse | Abwinkelbarkeit | PFA    |
|---------|--------|-----------------|--------|
| 80 mm   | C40    | 5 °             | 40 bar |
| 100 mm  | C40    | 5 °             | 40 bar |
| 125 mm  | C40    | 5 °             | 40 bar |
| 150 mm  | C40    | 5 °             | 40 bar |
| 200 mm  | C40    | 5 °             | 40 bar |
| 250 mm  | C40    | 5 °             | 40 bar |
| 300 mm  | C40    | 5 °             | 40 bar |
| 350 mm  | C30    | 4 °             | 30 bar |
| 400 mm  | C30    | 4 °             | 30 bar |
| 450 mm  | C30    | 4 °             | 30 bar |
| 500 mm  | C30    | 4 °             | 30 bar |
| 600 mm  | C30    | 4 °             | 30 bar |
| 700 mm  | C25    | 4 °             | 25 bar |
| 800 mm  | C25    | 4 °             | 25 bar |
| 900 mm  | C25    | 4 °             | 25 bar |
| 1000 mm | C25    | 4 °             | 25 bar |

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN $\geq$ 800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.

## Produkte

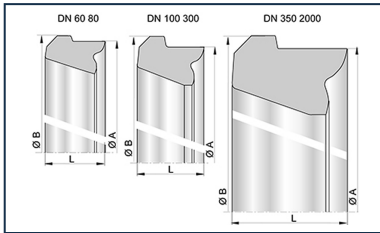

Dichtung Standard für  
Rohre und Formstücke  
KTW-BWGL DN60-2000