


## Kit Rohr Standard PE-U + Standard Vi Dichtung



DN	Klasse	Abwinkelbarkeit	PFA
80 mm	C40	5 °	16 bar
100 mm	C40	5 °	16 bar
125 mm	C40	5 °	16 bar
150 mm	C40	5 °	16 bar
200 mm	C40	4 °	16 bar
250 mm	C40	4 °	16 bar
300 mm	C40	3 °	16 bar
350 mm	C30	3 °	16 bar
400 mm	C30	2 °	16 bar
450 mm	C30	2 °	13 bar
500 mm	C30	2 °	11 bar
600 mm	C30	2 °	10 bar
700 mm	C25	2 °	10 bar
700 mm	C25	2 °	10 bar

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar

## Produkte

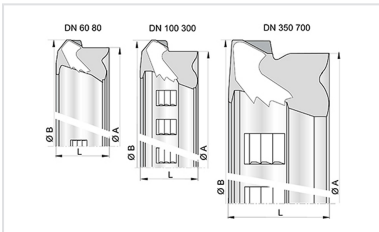

Dichtung Standard Vi für  
Rohre und Formstücke