

Kit Standard Rohr + Standard Verbindung



DN	Klasse	Abwinkelbarkeit	PFA
60	C40	5 °	40 bar
60	C64	5 °	64 bar
60	C100	5 °	100 bar
80	C40	5 °	40 bar
80	C64	5 °	64 bar
80	C100	5 °	100 bar
100	C40	5 °	40 bar
100	C64	5 °	64 bar
100	C100	5 °	100 bar
125	C40	5 °	40 bar
125	C64	5 °	64 bar
125	C100	5 °	93 bar
150	C40	5 °	40 bar
150	C64	5 °	64 bar
150	C100	5 °	89 bar
200	C40	5 °	40 bar
200	C50	5 °	50 bar
200	C64	5 °	64 bar
250	C40	5 °	40 bar
250	C50	5 °	50 bar
250	C64	5 °	64 bar
300	C40	5 °	40 bar
300	C50	5 °	50 bar
300	C64	5 °	64 bar

DN	Klasse	Abwinkelbarkeit	PFA
350	C30	4 °	30 bar
350	C40	4 °	40 bar
400	C30	4 °	30 bar
400	C40	4 °	40 bar
450	C30	4 °	30 bar
450	C40	4 °	40 bar
500	C30	4 °	30 bar
500	C40	4 °	40 bar
600	C30	4 °	30 bar
600	C40	4 °	40 bar
700	C25	4 °	25 bar
700	C30	4 °	30 bar
800	C25	4 °	25 bar
900	C25	4 °	25 bar
1000	C25	4 °	25 bar
1000	C30	4 °	30 bar
1100	C25	4 °	25 bar
1200	C25	4 °	25 bar
1400	C25	3 °	25 bar
1500	C25	3 °	25 bar
1600	C25	3 °	25 bar
1800	C25	2,5 °	25 bar
2000	C25	2 °	25 bar


DN (mm)	Klasse	Abwinkelbarkeit	PFA	Artikel-Nr.
80	C40	5 °	40 bar	NSA80Q60TQ-E00
100	C40	5 °	40 bar	NSB10Q60TQ-E00
100	C64	5 °	64 bar	NSB10C60TQ-E00
125	C40	5 °	40 bar	NSB12Q60TQ-E00
150	C40	5 °	40 bar	NSB15Q60TQ-E00
150	C64	5 °	64 bar	NSB15C60TQ-E00
200	C40	5 °	40 bar	NSB20Q60TQ-E00

DN (mm)	Klasse	Abwinkelbarkeit	PFA	Artikel-Nr.
60	C40	5 °	40 bar	NSA60Q60AQ-E00

DN (mm)	Klasse	Abwinkelbarkeit	PFA	Artikel-Nr.
60	C64	5 °	64 bar	NSA60C60AQ-E00
60	C100	5 °	100 bar	NSA60B60AQ-E00
80	C40	5 °	40 bar	NSA80Q60AQ-E00
80	C64	5 °	64 bar	NSA80C60AQ-E00
80	C100	5 °	100 bar	NSA80B60AQ-E00
100	C40	5 °	40 bar	NSB10Q60AQ-E00
100	C64	5 °	64 bar	NSB10C60AQ-E00
100	C100	5 °	100 bar	NSB10B60AQ-E00
125	C40	5 °	40 bar	NSB12Q60AQ-E00
125	C64	5 °	64 bar	NSB12C60AQ-E00
125	C100	5 °	93 bar	NSB12B60AQ-E00
150	C40	5 °	40 bar	NSB15Q60AQ-E00
150	C64	5 °	64 bar	NSB15C60AQ-E00
150	C100	5 °	89 bar	NSB15B60AQ-E00
200	C40	5 °	40 bar	NSB20Q60AQ-E00
200	C50	5 °	50 bar	NSB20D60AQ-E00
200	C64	5 °	64 bar	NSB20C60AQ-E00
250	C40	5 °	40 bar	NSB25Q60AQ-E00
250	C50	5 °	50 bar	NSB25D60AQ-E00
250	C64	5 °	64 bar	NSB25C60AQ-E00
300	C40	5 °	40 bar	NSB30F60AQ-E00
300	C50	5 °	50 bar	NSB30D60AQ-E00
300	C64	5 °	64 bar	NSB30C60AQ-E00
350	C30	4 °	30 bar	NSB35G60AQ-E00
350	C40	4 °	40 bar	NSB35F60AQ-E00
400	C30	4 °	30 bar	NSB40G60AQ-E00
400	C40	4 °	40 bar	NSB40F60AQ-E00
450	C30	4 °	30 bar	NSB45G60AQ-E00
450	C40	4 °	40 bar	NSB45F60AQ-E00
500	C30	4 °	30 bar	NSB50G60AQ-E00
500	C40	4 °	40 bar	NSB50F60AQ-E00
600	C30	4 °	30 bar	NSB60G60AQ-E00
600	C40	4 °	40 bar	NSB60F60AQ-E00
700	C30	4 °	30 bar	NSB70G70AQ-E00

DN (mm)	Klasse	Abwinkelbarkeit	PFA	Artikel-Nr.
700	C25	4 °	25 bar	NSB70H70AQ-E00
800	C25	4 °	25 bar	NSB80H70AQ-E00
800	C30	4 °	30 bar	NSB80G70AQ-E00
800	C40	4 °	40 bar	NSB80Q70AQ-E00
900	C30	4 °	30 bar	NSB90G70AQ-E00
900	C25	4 °	25 bar	NSB90H70AQ-E00
1000	C30	4 °	30 bar	NSC10G70AQ-E00
1000	C25	4 °	25 bar	NSC10H70AQ-E00
1100	C25	4 °	25 bar	NSC11H80AQ-E00
1200	C25	4 °	25 bar	NSC12H80AQ-E00
1400	C25	3 °	25 bar	NSC14H80AQ-E00
1500	C25	3 °	25 bar	NSC15H80AQ-E00
1600	C25	3 °	25 bar	NSC16H80AQ-E00
1800	C25	2,5 °	25 bar	NSC18H80AQ-E00
2000	C25	2 °	25 bar	NSC20H80AQ-E00

Produkte

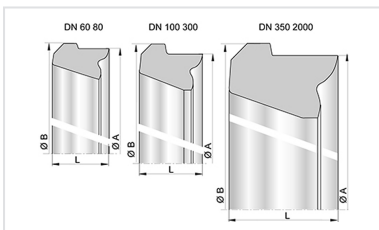

Dichtung Standard für
Rohre und Formstücke