



Kit Standard Rohr PUR + Standard Verbindung

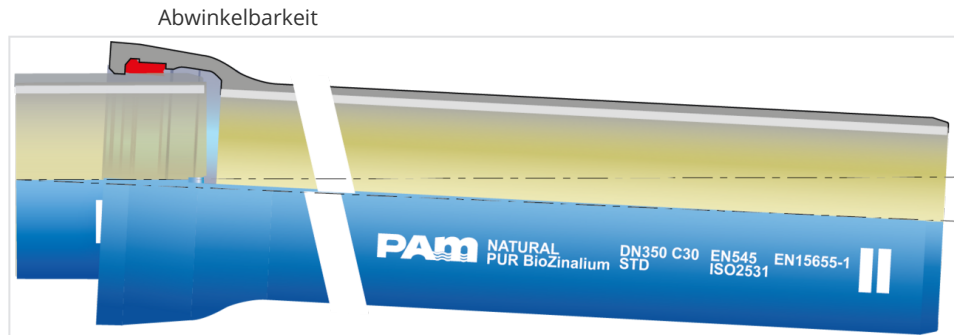

DN	Klasse	Abwinkelbarkeit	PFA
100 mm	C40	5 °	40 bar
100 mm	C64	5 °	64 bar
125 mm	C40	5 °	40 bar
125 mm	C64	5 °	64 bar
150 mm	C40	5 °	40 bar
150 mm	C64	5 °	64 bar
200 mm	C40	5 °	40 bar
200 mm	C50	5 °	50 bar
250 mm	C40	5 °	40 bar
300 mm	C40	5 °	40 bar
350 mm	C30	4 °	30 bar
400 mm	C30	4 °	30 bar
450 mm	C30	4 °	30 bar
450 mm	C40	4 °	40 bar
500 mm	C30	4 °	30 bar
500 mm	C40	4 °	40 bar
600 mm	C30	4 °	30 bar
600 mm	C40	4 °	40 bar
700 mm	C25	4 °	25 bar
800 mm	C25	4 °	25 bar
900 mm	C25	4 °	25 bar
1000 mm	C25	4 °	25 bar
1100 mm	C25	4 °	25 bar

DN	Klasse	Abwinkelbarkeit	PFA
1200 mm	C25	4 °	25 bar
1400 mm	C25	3 °	25 bar
1500 mm	C25	3 °	25 bar
1600 mm	C25	3 °	25 bar
1800 mm	C25	2,5 °	25 bar

Produkte

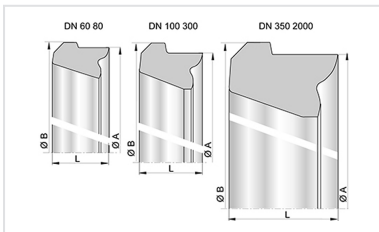

Dichtung Standard für
Rohre und Formstücke