


INTER-AX D400 Class Square Frame - Ventilated Bolt Down

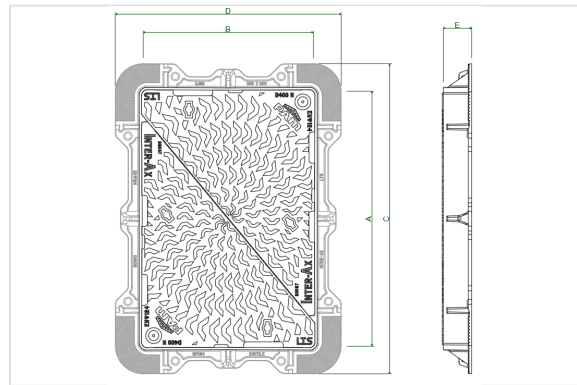


References	AxB	CxD	E	Packaging	Cover mass	Total Mass	Product code
206901	600x600 mm	780x820 mm	150 mm	10	28 kg	92.60 kg	BC16
185890	1250X678 mm	1500X878 mm	100 mm	5	36 kg	198.90 kg	BC81
185797	600x600 mm	800x800 mm	100 mm	10	28 kg	82.30 kg	BC08

RECOMMENDED FOR USE IN:

Carriageways carrying continuous heavy traffic.

The Inter-Ax2 combines a proven double triangular cover design with enhanced frame durability features that offers long term performance in a wide spectrum of applications.

DURABILITY

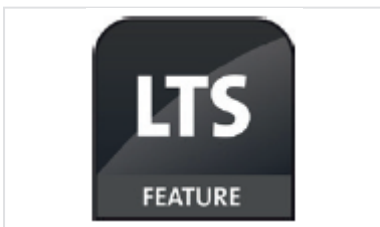

Includes the Load Transfer System (LTS) for optimum installation and product durability

PERFORMANCE D400



Three point suspension ensures non-rock and silent in operation performance

ACCREDITATION



Third party certified by BSI and kite marked to the requirements of BS EN 124. Compliant to the requirements of Highways England advice note HA104/09

ROAD SAFETY >70 PSRV RATING



Radial raised chequer design with independently verified skid & slip resistance values

SAVE COST AND TIME - INSTALL PLUS



Available with the Install Plus frame levelling and installation system as standard

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT : This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request