


Manhole cover ULT-EMAX D400 class Square frame – Not-ventilated



AxB (mm)	CxD (mm)	H (mm)	Cover mass (kg)	Total Mass (kg)	Packaging	Label
600x600	806x806	100	27.3	80.00	10	205763
600x600	806x806	150	27.3	91.00	10	205765
675x675	880x830	100	35.5	98.50	10	211605
675x675	880x830	150	35.5	109.70	5	211606

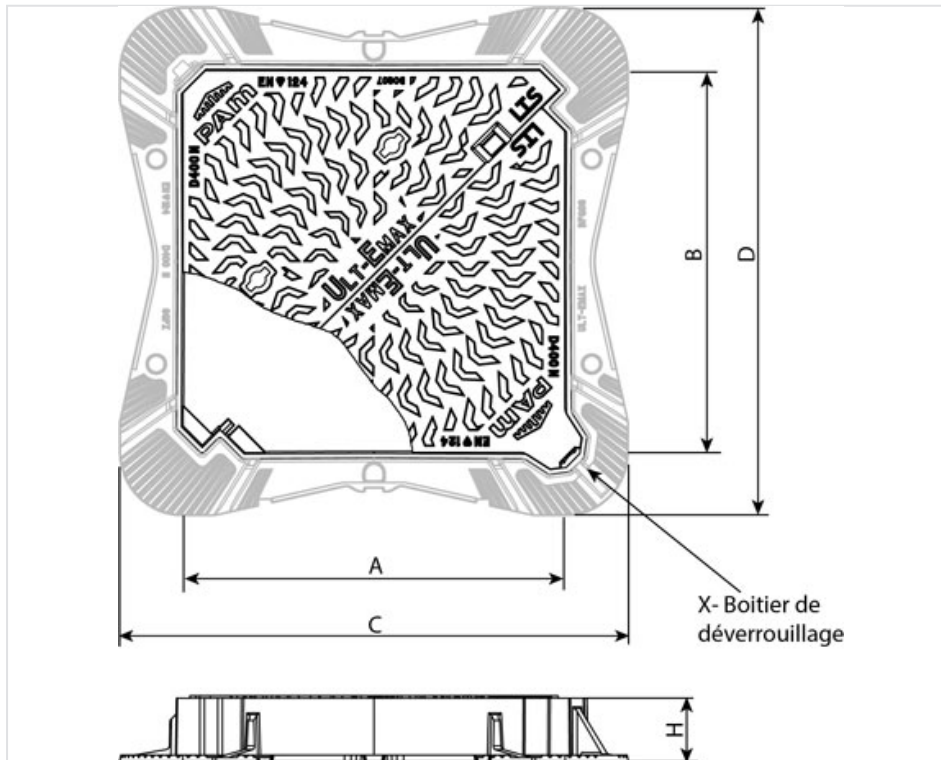

Material and coating:

- Cover and frame in Ductile Iron 500/7 to EN1563
- Water based coating

Field of use:

- D400 Class (Group 4) according to standard EN 124, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

Main characteristics:

- Double triangular
- Non-rock design
- Automatic cover security locking
- Single cover hinged design
- LTS installation and durability features
- HA104/09 compliant
- Sewers for Adaption 6 compliant



DURABILITY



Includes the Load Transfer System (LTS) for optimum installation and product durability

SECURITY



Integral automatic spring bar locking feature to deter unauthorised access offering increased asset security

PERFORMANCE D400



Three point suspension ensures non-rock and silent in operation performance

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT : This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request