


Hinged Manhole Cover R-TEX EYDAP Class D400 Ø 850 Round frame - Non Ventilated



| A (mm) | B (mm) | O (mm) | H (mm) | C (mm) | h (mm) | F (mm) | Total Mass (kg) | Cover mass (kg) | Packaging | References |
|--------|--------|--------|--------|--------|--------|--------|-----------------|-----------------|-----------|-------------|
| 850 | 785 | 600 | 104 | 637 | 26 | 96 | 54.60 | 34 | | CDRT60AFX54 |

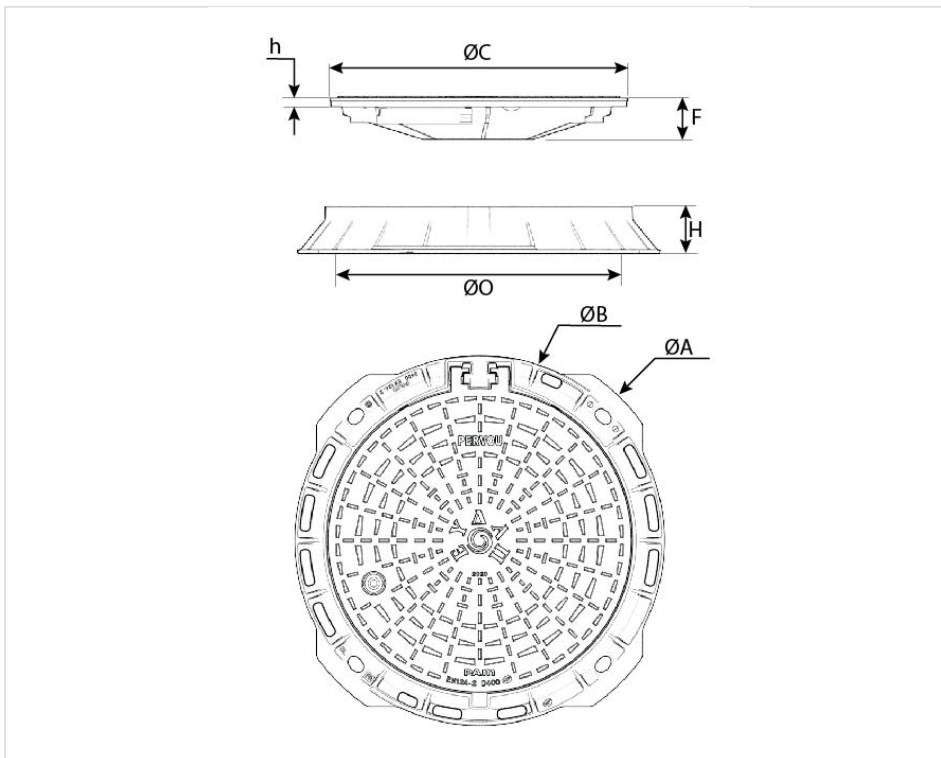

Field of application:

- Group 4 (class D 400) in accordance with EN124-2 standard, carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles.
- Medium traffic areas and periodic inspection.

Main characteristics:


- [Automatic locking by ductile iron spring bar](#)
- Hinged cover, opens to 110 °, blocks at 90° when closing
- Frame fitted for optimized bedding
- [Optional cover anti-theft spline](#)
- [Optional locking system](#)

- Two moulded rings for anti-theft features by chain
- Compliant with [INSTALL PLUS](#) installation kit

Material and coating:

- Frame and Cover in ductile iron Grade EN GJS 400-15, water based coating
- Dural-Plus gasket technology allow a massive durability under traffic, and against traffic environment aggressiveness (oil, sand, movement...), with a very low sensitivity against low and hot temperatures

Linked products

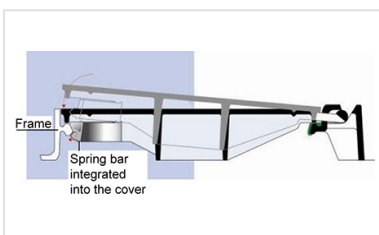

Manhole covers - Locking of the cover by spring bar



1/4 turn locks



Cover anti-theft spline - Manhole cover TEK and B-TEC



The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.

COPYRIGHT AND DESIGN RIGHT: This drawing is the exclusive property of Saint-Gobain PAM UK and is confidential and must not be reproduced or disclosed for any third party without written consent. It must be used only for the purpose for which it has been issued and is returnable on request