


Tee PROCESS FM with 3 Rotatable Flanges PN16

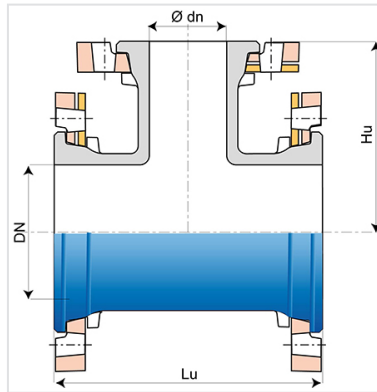

Ductile iron networks for fire protection

DN (mm)	Ødn (mm)	Lu (mm)	Hu (mm)	PN	Mass (kg)	References
100	100	360	180	16	16.90	BAB10UE1FTTF
150	100	440	210	16	31.00	BAB15UE1FTTF
150	150	440	220	16	31.50	BAB15UE1JTTF
200	100	520	240	16	44.50	BAB20UE2FTTF
200	125	520	240	16	46.00	BAB20UE2GTTF
200	150	520	250	16	48.00	BAB20UE2JTTF
200	200	520	260	16	51.00	BAB20UE2KTTF
250	100	430	270	16	46.90	BAB25UV2FTTF
250	150	447	280	16	62.00	BAB25UE2JTTF
250	200	540	290	16	72.30	BAB25UE2KTTF
250	250	600	300	16	67.10	BAB25UE2LTTF
300	100	450	300	16	61.50	BAB30UV2FTTF
300	150	560	310	16	87.00	BAB30UE2JTTF
300	200	560	320	16	76.20	BAB30UE2KTTF
300	250	680	305	16	106.00	BAB30UE2LTTF
300	300	680	340	16	115.00	BAB30UE2MTTF

Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

Marking :

- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100-150

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.