


Tee PROCESS FM with 3 Rotatable Flanges PN25

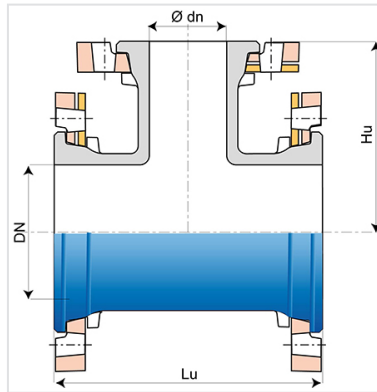

Ductile iron networks for fire protection

DN (mm)	Ødn (mm)	Lu (mm)	Hu (mm)	PN	Mass (kg)	References
100	100	360	180	25	20.50	BAB10UE3FTTF
150	100	440	210	25	33.50	BAB15UE3FTTF
150	150	440	220	25	38.00	BAB15UE3JTTF
200	100	520	240	25	48.00	BAB20UE3FTTF
200	150	520	250	25	52.10	BAB20UE3JTTF
200	200	520	260	25	55.50	BAB20UE3KTTF
250	100	430	270	25	53.40	BAB25UV3FTTF
250	250	600	300	25	74.90	BAB25UE3LTTF
300	100	450	300	25	70.40	BAB30UV3FTTF
300	250	680	305	25	117.00	BAB30UE3LTTF
300	300	680	340	25	104.90	BAB30UE3MTTF
400	200	605	380	25	164.90	BAB40UE3KTTF
400	250	724	390	25	187.00	BAB40UE3LTTF
400	300	724	400	25	193.70	BAB40UE3MTTF
400	400	840	420	25	235.00	BAB40UE3NTTF

Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

Marking :

- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100-200



DN250-300



DN400

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.