


Taper PROCESS FM with Rotatable Flanges PN16

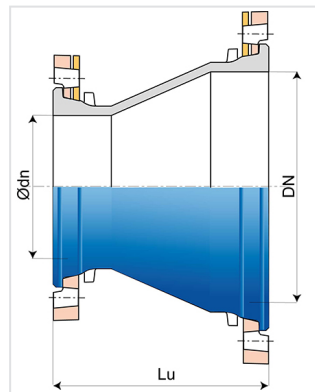

Ductile iron networks for fire protection

DN (mm)	$\varnothing dn$ (mm)	Lu (mm)	PN	Mass (kg)	References
150	100	306	16	15.70	BAB15VE1FTTF
200	100	385	16	22.70	BAB20VE2FTTF
200	150	304	16	23.50	BAB20VE2JTTF
250	150	319	16	34.50	BAB25VE2JTTF
250	200	300	16	33.00	BAB25VE2KTTF
300	150	424	16	39.50	BAB30VE2JTTF
300	200	323	16	40.50	BAB30VE2KTTF
300	250	300	16	51.80	BAB30VE2LTTF

Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250 μ m (PECB)
- FM Approval (Factory Mutual System)

Marking :

- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100-150

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.