
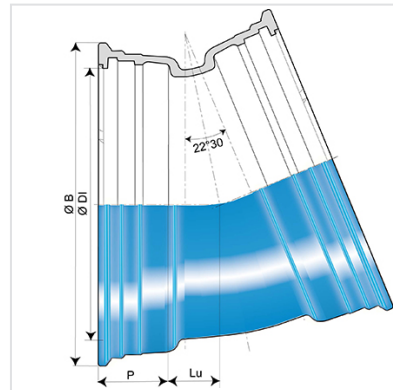


Bend 22°30 (1/16) PROCESS FM with 2 sockets STANDARD

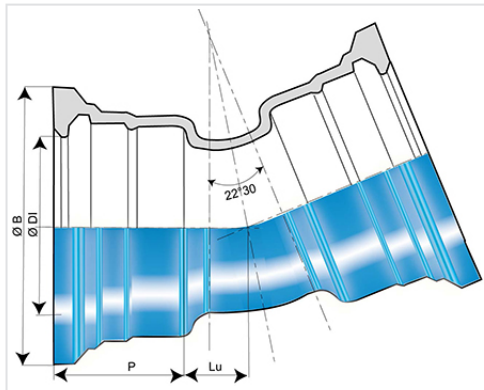

Ductile iron networks for fire protection

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	100	35	88	121.4	187.5	7.80	SSB10CD00TTF
22°30	150	42	94	173.4	241	12.20	SSB15CD00TTF
22°30	200	51	100	225.5	294	18.90	SSB20CD00TTF
22°30	250	70	105	277.3	351	32.20	SSB25CD00TTF
22°30	300	70	110	329.3	408.3	42.20	SSB30CD00TTF
22°30	400	92	112	432.4	515.3	68.70	SSB40CD00TTF

Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

Marking :


- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100



DN150

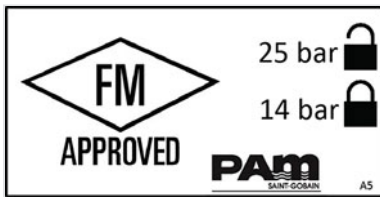

DN200-300



DN400

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.