
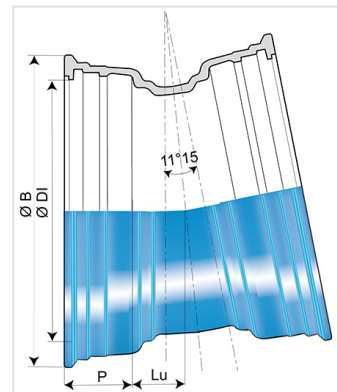


## Bend 11°15 (1/32) PROCESS FM with 2 sockets STANDARD

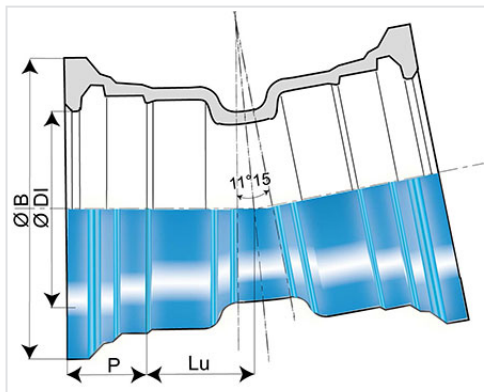

Ductile iron networks for fire protection

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
11°15	100	40	88	121.4	187.5	7.90	SSB10CE00TTF
11°15	150	46	94	173.4	241	12.60	SSB15CE00TTF
11°15	200	52	100	225.5	294	19.20	SSB20CE00TTF
11°15	250	55	105	277.3	351	30.50	SSB25CE00TTF
11°15	300	50	110	329.3	408.3	39.70	SSB30CE00TTF
11°15	400	58	112	432.4	515.3	61.50	SSB40CE00TTF

### Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

### Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

**Marking :**


- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100



DN150

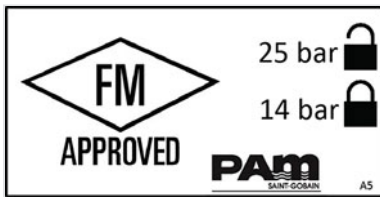

DN200-300



DN400

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*