


Tee PROCESS FM with 3 sockets STANDARD

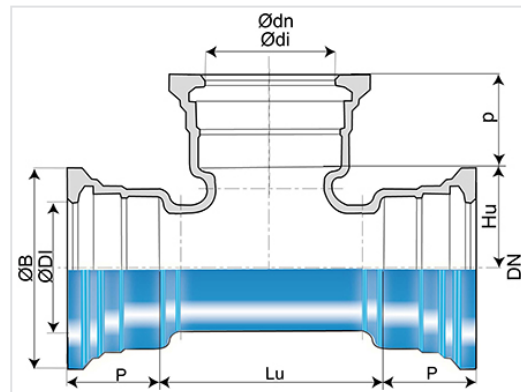

Ductile iron networks for fire protection

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Hu (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	100	210	88	121.4	187.5	105	88	121.4	14.90	SSB10TE0FTTF
150	100	190	94	173.4	241	140	88	121.4	19.80	SSB15TE0FTTF
150	150	305	94	173.4	241	152.5	94	173.4	27.00	SSB15TE0JTTF
200	100	195	100	225.5	294	170	88	121.4	27.50	SSB20TE0FTTF
200	150	250	100	225.5	294	177.5	94	173.4	32.30	SSB20TE0JTTF
200	200	360	100	225.5	294	180	100	225.5	40.70	SSB20TE0KTTF
250	100	234	105	277.3	351	183	88	121.4	32.30	SSB25TE0FTTF
250	150	251	105	277.3	351	164.5	94	173.4	36.90	SSB25TE0JTTF
250	250	404	105	277.3	351	202	105	277.3	49.70	SSB25TE0LTTF
300	100	237	110	329.3	408.3	213	88	121.4	41.00	SSB30TE0FTTF
300	150	347	110	329.3	408.3	194.5	94	173.4	46.00	SSB30TE0JTTF

Field of use:

- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

Marking :


- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.



DN100



DN150

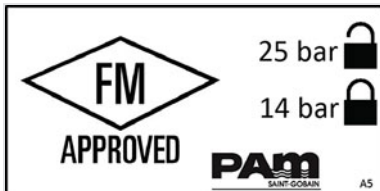

DN200-300



DN250-300

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.