


## Tee PROCESS FM with 2 sockets STANDARD and Rotatable Flange branch PN16

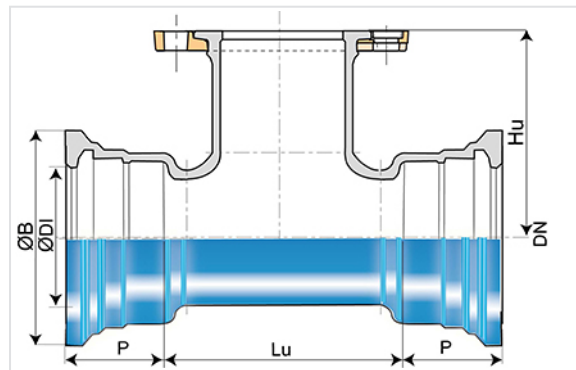

Ductile iron networks for fire protection

DN (mm)	Ødn (mm)	Lu (mm)	Hu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
100	100	210	180	88	121.4	187.5	16.40	SSB10UD1FTTF
150	100	190	215	94	173.4	241	21.40	SSB15UD1FTTF
150	150	305	220	94	173.4	241	29.50	SSB15UD1JTTF
200	100	195	245	100	225.5	294	29.10	SSB20UD1FTTF
200	150	250	245	100	225.5	294	34.90	SSB20UD1JTTF
200	200	360	260	100	225.5	294	44.60	SSB20UD2KTTF
250	100	234	270	105	277.3	351	32.80	SSB25UV1FTTF
250	150	251	280	105	277.3	351	39.00	SSB25UD1JTTF
250	200	344	290	105	277.3	351	47.20	SSB25UD2KTTF
250	250	404	300	105	277.3	351	55.80	SSB25UD2LTTF
300	100	237	300	110	329.3	408.3	58.10	SSB30UV1FTTF
300	150	347	310	110	329.3	408.3	48.80	SSB30UD1JTTF
300	200	347	320	110	329.3	408.3	58.50	SSB30UD2KTTF
300	250	467	305	110	329.3	408.3	67.90	SSB30UD2LTTF
300	300	467	340	110	329.3	408.3	78.60	SSB30UD2MTTF

### Field of use:


- Any fire protection networks, restrained or not, buried
- Installation in any industrial sites or other works of civil engineering

### Main characteristics:

- Pressure strength: tests according to FM Approval CN1610 (see label below)
- Internal and external coating: blue Epoxy Powder 250µm (PECB)
- FM Approval (Factory Mutual System)

### Marking

- The indicated values indicate the pressure tests with or without restraining.
- The certification tests FM are realized according to the FM approvals Class number 1610 (September 2006) referential.
- Marking on high durability engraved laser acrylate label.

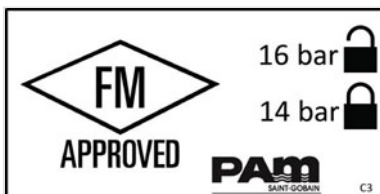

DN200-300

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*