


## Flat square grating OPTEA - Class C250



AxA (mm)	O (mm)	H (mm)	h (mm)	Total Mass (kg)	Grating mass (kg)	Waterway area	Packaging	References
300x300	200	60	36	8.10	4.8	2.28 dm <sup>2</sup>	60	ECOP30PF
400x400	303	65	36	13.80	9.7	5.20 dm <sup>2</sup>	10	ECOP40PF
500x500	400	70	36	19.20	14	9.50 dm <sup>2</sup>	10	ECOP50PF
600x600	500	85	36	29.80	22.7	15.3 dm <sup>2</sup>	10	ECOP60PF

Width holes: 19.5 to 21 mm - Length holes: 85 to 91 mm

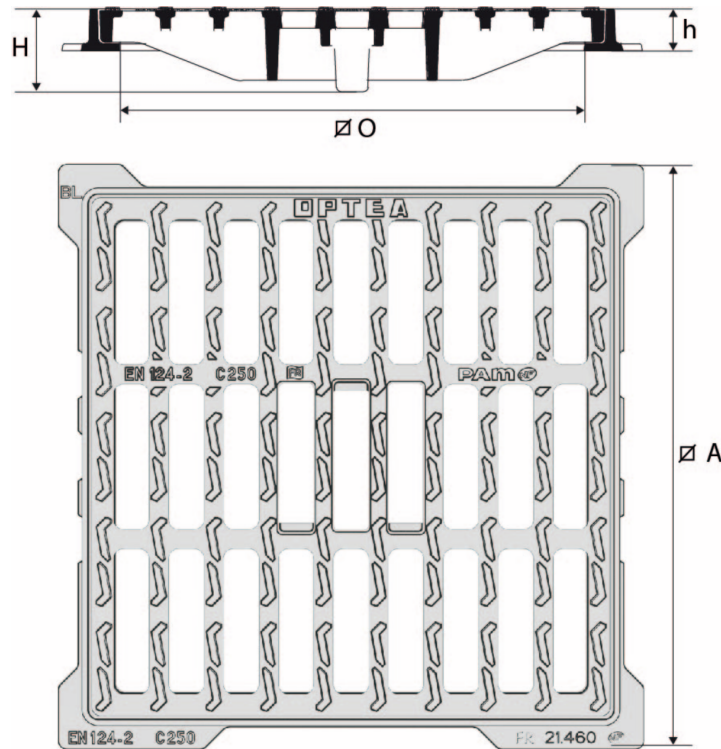

## Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: water base

## Origine France Garantie

- This product is made in France in our foundry in Blénod-les-Pont-A-Mousson (54), and is certified Origine France Garantie. This guarantees consumers that the product is made in France in accordance with specifications available on [originefrancegarantie.fr](http://originefrancegarantie.fr). The certification number is: BVCert 6026906.
- “Origine France Garantie certification is awarded by an independent certification body. Checks are then carried out every year to ensure that the product is indeed 100% made in France and that at least 50% of the product’s manufacturing costs (including raw materials) are of French origin”.»

## Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.

## Main characteristics:

- Omnidirectional spot collection
- Widened corner for added anchoring and stability

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*