


Flat VIATOP grating 500 x 500 - C250 Class

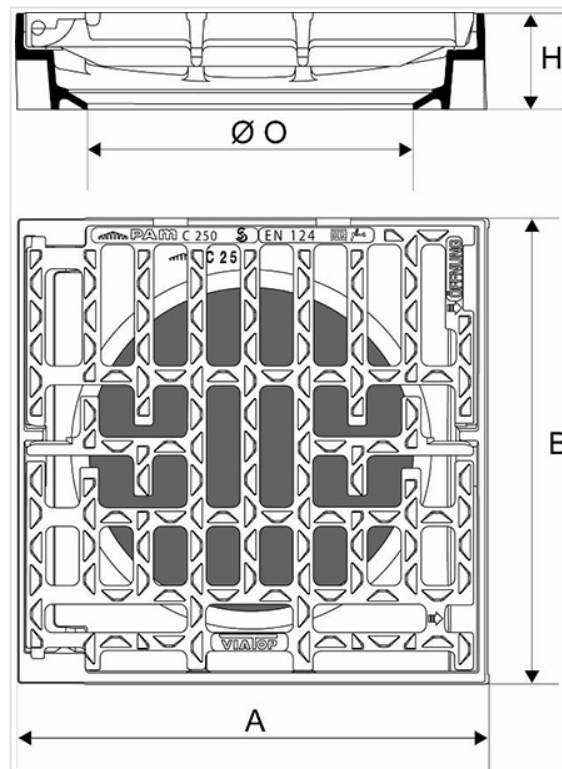

| AxB (mm) | O (mm) | H (mm) | Total Mass (kg) | Grating mass (kg) | Waterway area | Packaging | References |
|----------|--------|--------|-----------------|-------------------|-----------------------|-----------|------------|
| 500x500 | 350 | 102 | 44.00 | 15 | 10.36 dm ² | 16 | ECVT50EG |

Width holes: 24 to 40 mm - Length holes: 57 to 154 mm

Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: water base

Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Multidirectional punctual or kerbside collection.



Main characteristics:

- Hinged grating.
- Automatic locking by spring bar.
- Simple assembly and fast disassembling.
- Protection against theft cannot be dismantled without tool.

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.