


SELECTA MAXI Gully unit T profile - Flat grating - C250 Class



AxB (mm)	Grating mass (kg)	Cover mass (kg)	Mass of frame + extension (kg)	Total mass (kg)	Waterway area	Packaging	References
750x640	21.3	24	44	89.00	11.6 → 14.5 dm ²	6	ECSE75UFX29

AxB (mm)	C (mm)	D (mm)	E (mm)	H (mm)	h1 (mm)	h2 (mm)	Depth adjustment (mm)
750x640	250	310	347	280	90	65	105

Height adjustment range: (relative to the water line) - Low position: H-h2 = 110 mm - High position: H-h2 = 215 mm - For adjustment from 110 to 215 mm, remove the intermediate nuts and washers during assembly

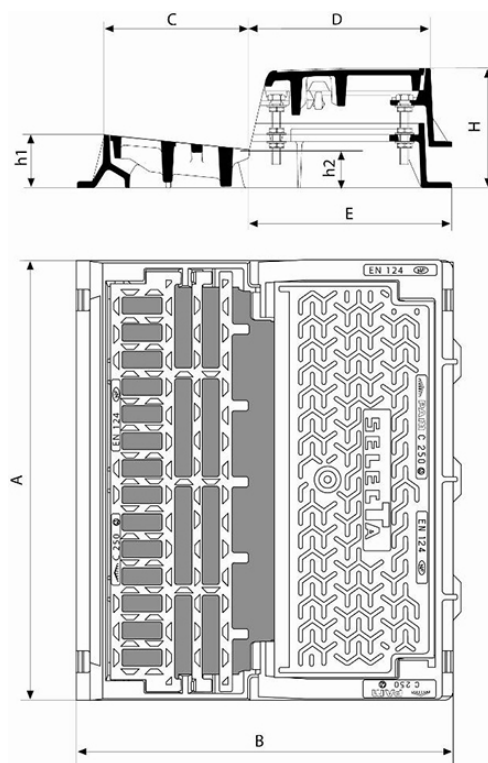

Material and coating:

- Frame, grating and cover in Ductile Iron EN GJS 400-15: water base

Origine France Garantie

- This product is made in France in our foundry in Blénod-les-Pont-A-Mousson (54), and is certified Origine France Garantie. This guarantees consumers that the product is made in France in accordance with specifications available on originefrancegarantie.fr. The certification number is: BVCert 6026906.
- "Origine France Garantie certification is awarded by an independent certification body. Checks are then carried out every year to ensure that the product is indeed 100% made in France and that at least 50% of the product's manufacturing costs (including raw materials) are of French origin".»

Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Compatible with the T1, T2, T3, T4 and T5 kerbs and CS2, CS3 and CS4 gutters according standard to NF P 98-340.

Main characteristics:

- Grating and cover:
 - Hinged separately and can be easily dismantled
 - Secured by spring-bar lock requiring a tool for the opening.
 - Grating optimised for absorption and safety: facets that promote the removal of leaves by rain and ensure the splitting of the film of water.
 - Total opening offering a wide surface of access: 540 x 450 mm.
 - Frame in 2 parts adjustable in height and slope.
 - [Implementation](#)
-
- Adjustment screws inside allow for adjustment after bedding (for low heights, leave a clear area under the screws to allow them to be lowered).

Linked products



Gully units SELECTA 500
and MAXI C250 -
Implementation

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.