


Concave grating VIATOP 300 x 500 D400 Class

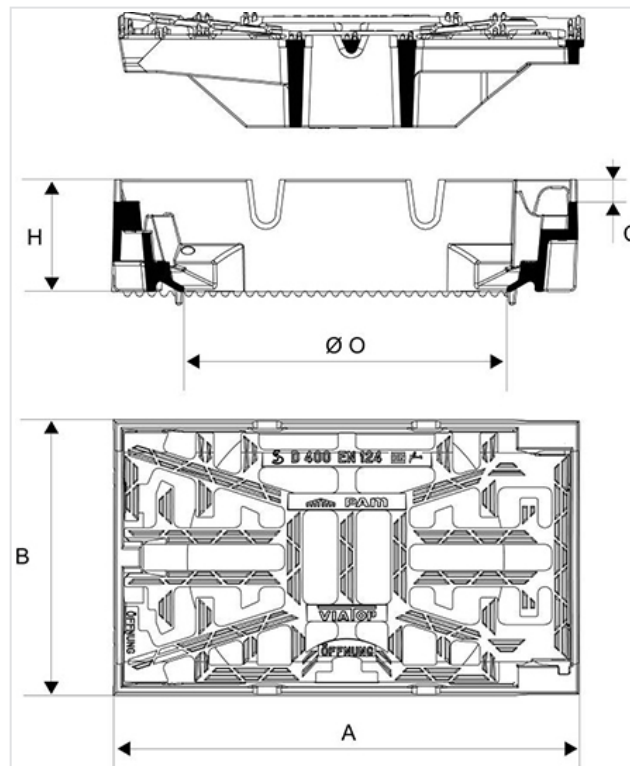

AxB (mm)	O (mm)	H (mm)	C (mm)	Total Mass (kg)	Grating mass (kg)	Waterway area	Packaging	References
520x305	365	127	20	43.45	20	6.2 dm ²	16	EDVT53KG

Width holes : ≤ 40 mm - Length holes : ≤ 161 mm

Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: bituminous coating or water base

Field of application:

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Multidirectional punctual or kerbside collection.




Main characteristics:

- Hinged grating with spring bar
- [Specific design ensuring the stability of the grating](#)
- Anti-skid surface designed for optimal absorption
- Centring studs for plastic pipes

Mudpan type C or D in accordance with DIN 4052

Linked products

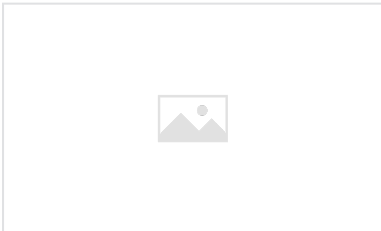

Manhole covers and gully grates C250 and D400 class



Opening, disassembling and reassembly DEDRA 400 grating D400 class

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.