




Flat grating BALTICA 2 Class D400 Frame with 3 side-flange



AxB (mm)	O (mm)	E (mm)	H (mm)	h (mm)	Total Mass (kg)	Grating mass (kg)	Waterway area	Packaging	References
600x400	450	700	115	30	44.00	22.6	10.3 dm ²	10	EDBA64BAX13

Width holes: 22 to 29 mm - Length holes: <116 mm

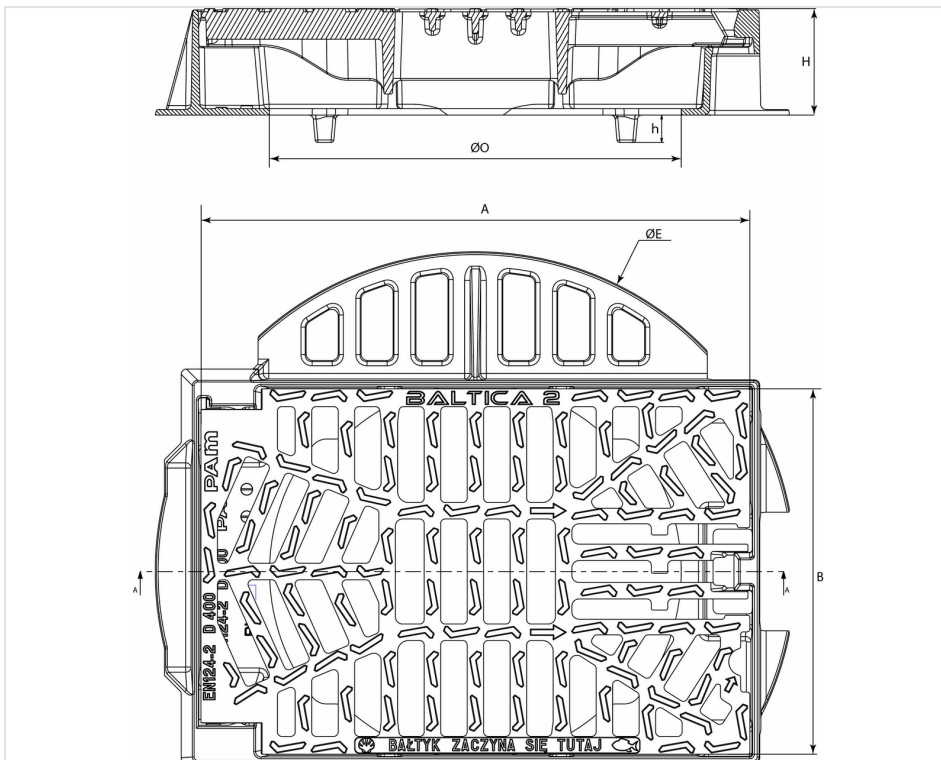



Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: bituminous coating

Field of application:

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Installation along Kerbside.

Main characteristics:

- Compliance with standard EN 124-2: 2015, certified by SG PAM, as provided for in the Standard.
- Hinged grating locked with spring bar.
- Large bearing surface of the frame.
- Unlocking by standard tools (pickaxe, crow bar) in dedicated area.
- 4 legs for centering on network access construction.
- Environmental message about impact of waste on Baltic sea "BAŁTYK ZACZYNA SIĘ TUTAJ".







The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.