


**REXEL grating Safety - Round frame D400 class**



A (mm)	C (mm)	O (mm)	h (mm)	F (mm)	H (mm)	Total mass (kg)	Grating mass (kg)	Waterway area	Packaging	References
850	643.5	600	100	26	100	55.10	32	10.2 dm <sup>2</sup>	10	EDRX60BF

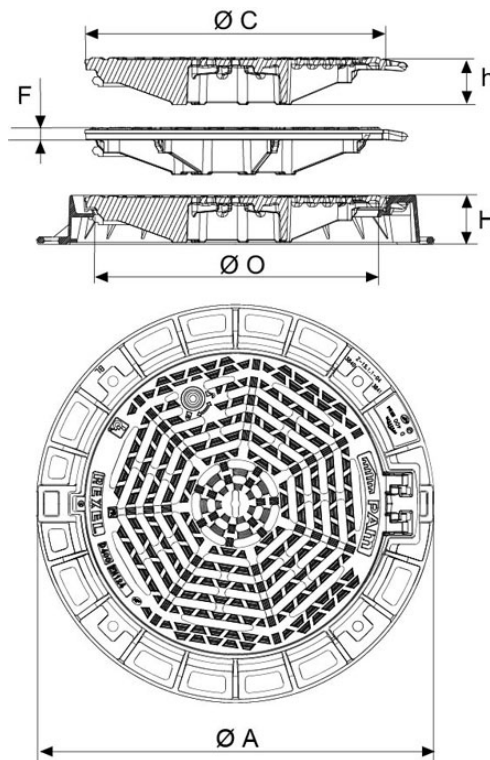

## Material and coating:

- Frame and grating in Ductile Iron EN GJS 400-15: water base
- [Ring in PE](#)

## Field of application:

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Zones of normal traffic.

## Main characteristics:

- [Automatic locking by spring bar](#)
- Hinged grating, 90° safety blocking, opening to 110°
- Interchangeable grating with the Rexel 1 cover
- Frame fitted to the optimized bedding
- [Optional quarter turn locking system](#)


## Linked products



Polyethylene ring



¼ turn locks

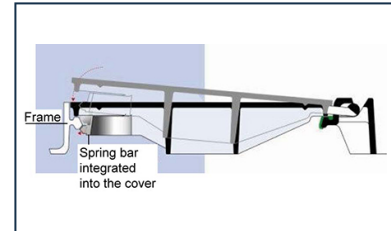

Manhole covers - Locking of the cover by spring bar

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*