




## Manhole Cover DYNATOP 2 Class D400 Round frame – Non Ventilated



A (mm)	O (mm)	H (mm)	Total Mass (kg)	Cover mass (kg)	Packaging	References
785	611	101.5	67.80	33	10	CDDP60AG

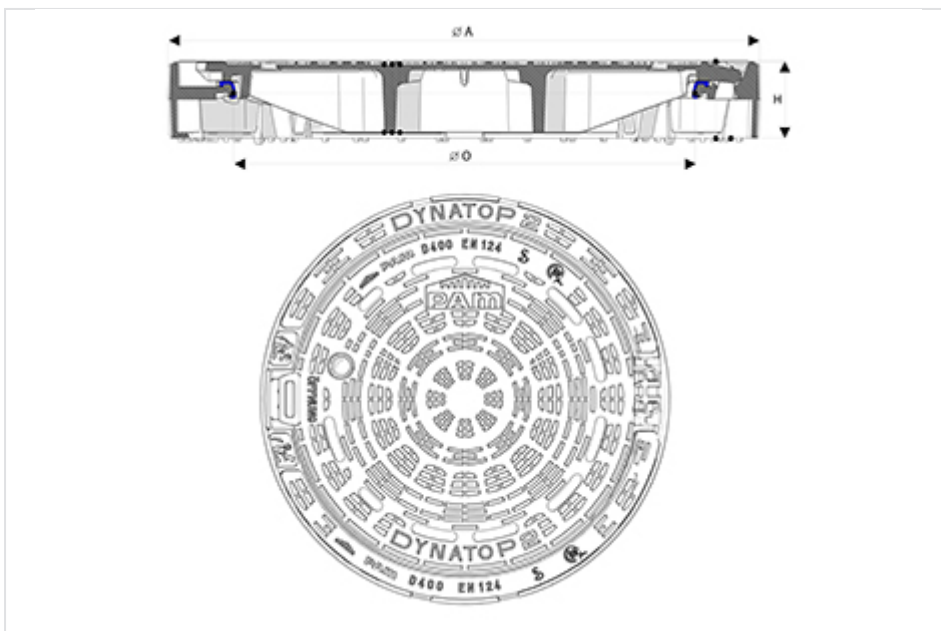



### Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating
- Ring in polyethylene in 4 parts (reference CDDP60AG-J)


### Field of application:

- Group 4 (class D 400) in accordance with EN124-2 standard: carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles
- Normal traffic and periodic inspections.

### Main characteristics:

- [Automatic locking by ductile iron spring bar](#)
- Hinged cover, opens to 130°, blocks at 90° when closing
- [Optional locking system](#)

### Linked products

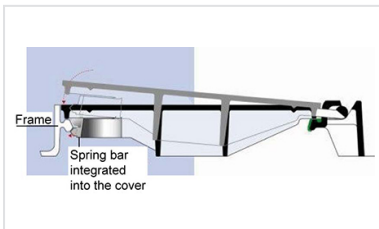

Manhole covers - Locking of the cover by spring bar



1/4 turn locks

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*