


Manhole Cover KORUM 600 Safety Class D400 Round frame - Non Ventilated



A (mm)	O (mm)	H (mm)	h (mm)	Total Mass (kg)	Cover mass (kg)	Packaging	Version	References
841	606	104	96	61.65	38	10	Anti-theft spline	CDKO60EFX17
841	606	104	96	62.72	38	10	Lock	CDKO60EFX15
841	606	104	96	62.87	38	10	Spline + lock	CDKO60EFX31

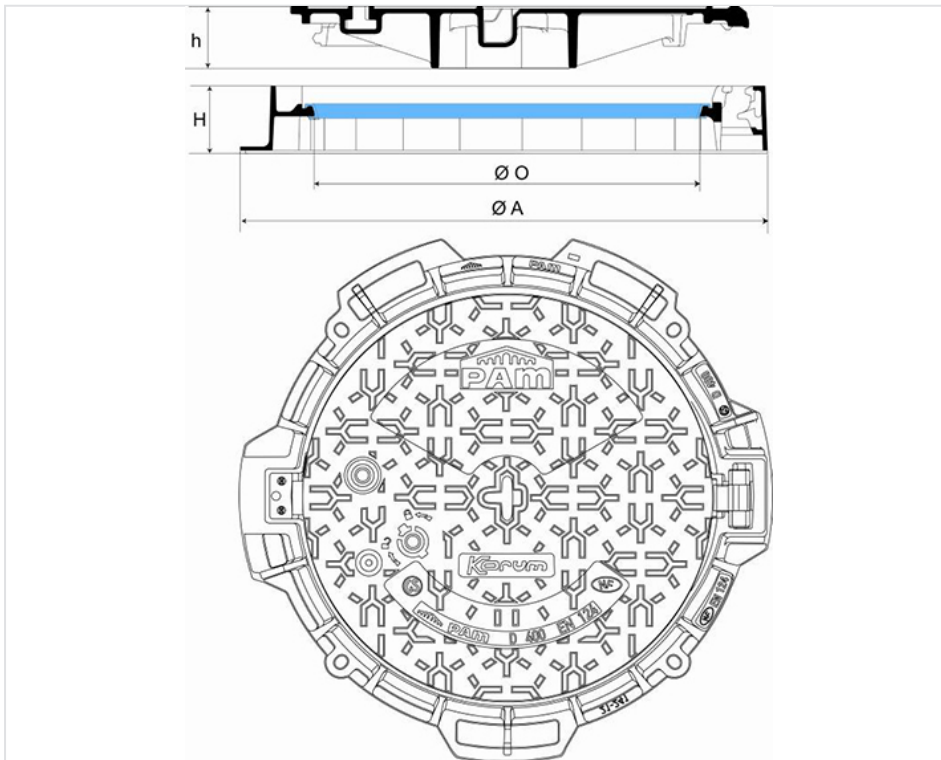

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base
- [Ring in EVA](#)

Field of application:

- Group 4 (class D 400) in accordance with EN124-2 standard, carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles.
- Intensive traffic and periodic inspection.

Main characteristics:

- [Automatic locking by ductile iron spring bar](#)
- Hinged cover, opens to 110 °, blocks at 90° when closing
- Frame fitted for optimized bedding


Security

- [Kit lock type D50](#) (reference C47)
- [Locking key for lock type D50](#) (reference C46)
- [Anti-theft spline](#)

Linked products



EVA ring

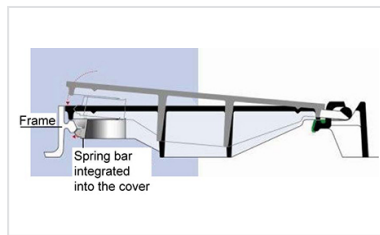

Manhole covers - Locking of the cover by spring bar



Cover anti-theft spine for Manhole cover KOREX 600 and BELSYS 600

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.