


Inspection Box with Flanges (German version)

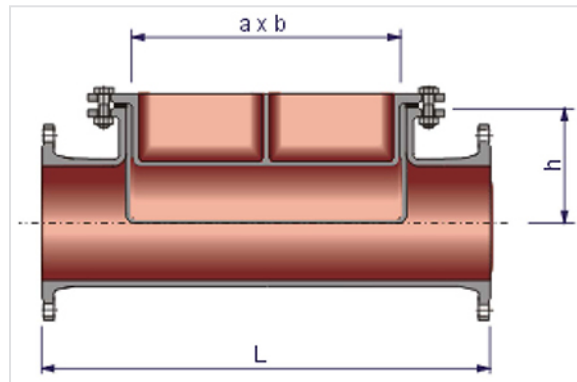

DN (mm)	Mass (kg)	References
80	37.50	102513
100	47.50	102514
125	65.00	102566
150	80.00	102515
200	113.00	102516
250	167.00	102517
300	215.00	102518
400	350.00	102519
500	414.00	104672

Reference including Flat gasket, bolts, screws and nuts (galvanized)

DN mm	a mm	b mm	h mm	L mm
80	250	80	72	500
100	250	100	82	500
125	300	125	95	550
150	290	152	115	550
200	330	202	150	650
250	360	253	190	700
300	400	304	219	750
400	480	404	277	900
500	550	504	342	900

Field of use:

- Access to the networks for control and maintenance (under pressure)
- The inspection boxes (German type) guarantee the tightness of the pipe in case of backflow in the crossing of the manhole.
- They are equipped with flanges and are used for pressures (PFA) of 10 bars.
- They are used for rain water and sewage

Main characteristics:

- The inspection boxes are in ductile iron in accordance with NF EN 598.
- CE Marking
- Mark NF
- The inspection boxes are internally and externally coated with red-brown powder epoxy (mini 250µm) in accordance with NF EN 14901.
- Flanges are in accordance with NF EN 1092-2.
- The manhole cover joint is a flat joint NBR

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.