

## Kit INTEGRAL Standard TT PE-C Pipe + Standard Gasket




DN	Angular deflection	PFA	References
150	5 °	40 bar	TSB15S60BG-E01
200	5 °	40 bar	TSB20S60BG-E01
250	5 °	38 bar	TSB25S60BG-E01
300	5 °	35 bar	TSB30S60BG-E01
350	4 °	32 bar	TSB35S60BG-E01
400	4 °	30 bar	TSB40S60BG-E01
450	4 °	29 bar	TSB45S60BG-E01
500	4 °	28 bar	TSB50S60BG-E01
600	4 °	26 bar	TSB60S60BG-E01
700	4 °	29 bar	TSB70E70BG-E01
800	4 °	28 bar	TSB80E70BG-E01
900	4 °	27 bar	TSB90E70BG-E01
1000	4 °	26 bar	TSC10E70BG-E01

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar
- DN≥800 : Reference pipe + joint only. Don't forget to add roll of 30m Heat-shrink Collar and box of 25 Closing sleeve. Quantity to be determined depending on the project.


## Accessories



Elastomer Sleeve TT PE -  
Protection of joints of pipes  
and fittings DN60 to 300

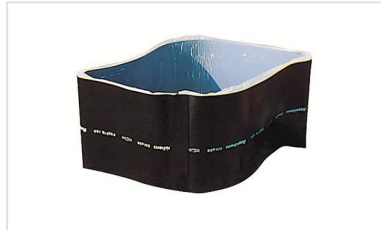


Heat-shrink Collar for TT PE  
Standard and Universal

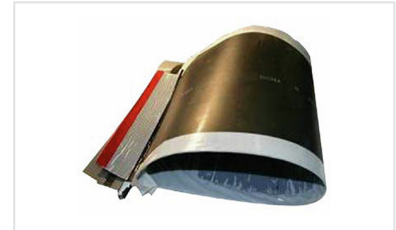


Heat-shrink Collar for TT PE  
Standard et Universal - Roll

## Linked products

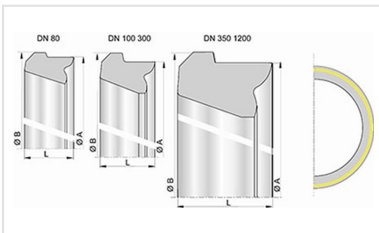

Nitrile STD Gasket  
DN80-2000

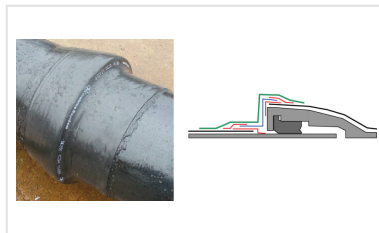

Assembly of the aluminium  
sleeve on TT pipes

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*