


## Tee INTEGRAL with 3 sockets STANDARD

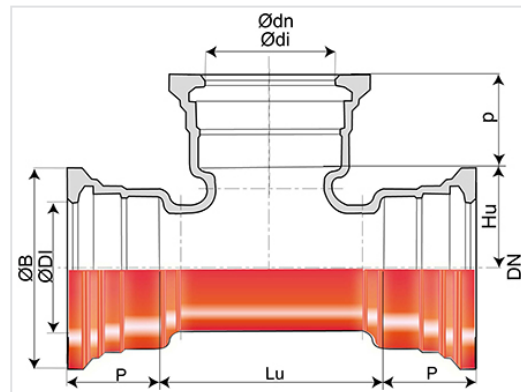

DN (mm)	Ødn (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Hu (mm)	p (mm)	Ødi (mm)	Mass (kg)	References
100	100	210	88	131	187.5	105	88	121	15.50	TSB10TE0F
125	125	267	91	147	214.5	133.5	91	147	21.80	TSB12TE0G
150	100	190	94	173	241	140	88	121	20.60	TSB15TE0F
200	100	195	100	225	294	170	88	121	28.50	TSB20TE0F
200	150	250	100	225	294	177.5	94	173	33.40	TSB20TE0J
200	200	360	100	225	294	180	100	225	41.90	TSB20TE0K
250	100	234	105	277	351	183	88	121	41.30	TSB25TE0F
300	200	347	110	329	408	198	100	225	70.30	TSB30TE0K
300	250	467	110	329	408	207	105	277	85.50	TSB30TE0L
300	300	467	110	329	408	233.5	110	329	92.10	TSB30TE0M


### Field of use:

- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13


## Main characteristics:

- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Designed according to the regulatory texts:
  - NF EN 476: general prescriptions for components used in the networks
  - NF EN 752: Conception of sewage projects
  - NF EN 1610: Reception of the works
  - CCTG: Fascicule 70 (sewage work)


## Linked products

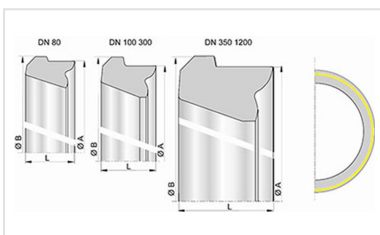

Nitrile STD Gasket  
DN80-2000

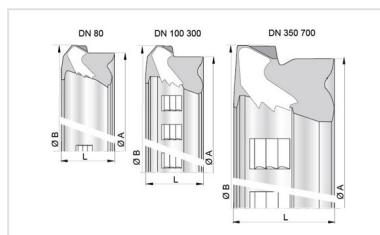

Gasket ViLoK® (NBR STD  
Vi) DN80-700

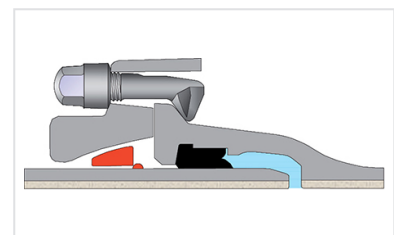

STD Ve joint for INTEGRAL  
STD Fittings

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*