


Flange Socket INTEGRAL with socket STANDARD (Fixed Flange)

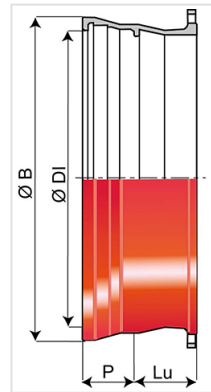

DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	PN 10		PN 16	
					Mass (kg)	References	Mass (kg)	References
1100	220	150	1155	1298	350.00	SSC11BE10FF	386.00	SSC11BE20FF
1200	240	195	1263	1412	443.00	SSC12BE10FF	484.00	SSC12BE20FF
1400	310	255	1467	1600	716.00	SSC14BE10FF	768.00	SSC14BE20FF
1500	360	280	1570	1742	898.00	SSC15BE10FF	986.00	SSC15BE20FF
1600	330	275	1673	1820			1046.00	SSC16BE20FF
1800	387	258	1881.7	2038	1212.00	SSC18BE10FF	1326.00	SSC18BE20FF
2000	395	290	2089	2269	1659.00	SSC20BE10FF	1789.00	SSC20BE20FF

Field of use:


- Separate sewer system and combined sewer system
- Application: gravity flow and rising main sewerage systems
- Type of effluent: domestic wastewater and rainwater
- For networks with rising main under pressure
- For effluents between pH1 and pH13

Main characteristics:


- External and internal coating: red epoxy powder 250µm (PECR)
- Type of joint: Standard
- Standard Gasket in Nitrile
- EN 598 / CE Marking
- Declaration of performances [DoP-INTEGRAL005EN](#)
- Mark NF

- Designed according to the regulatory texts:
 - NF EN 476: general prescriptions for components used in the networks
 - NF EN 752: Conception of sewage projects
 - NF EN 1610: Reception of the works
 - CCTG: Fascicule 70 (sewage work)

Linked products

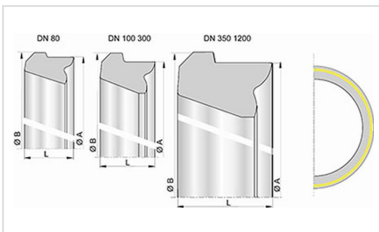

Nitrile STD Gasket
DN80-2000

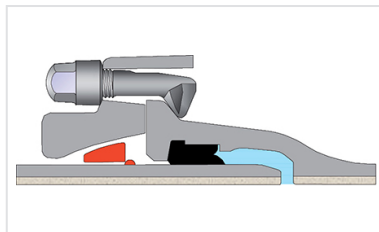

STD Ve joint for INTEGRAL
STD Fittings

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.