


QUICK BLUTOP anchored




DN flange (mm)	DN/OD (mm)	ØDE (mm)	A (mm)	B (mm)	Mass (kg)	References
60/65	75	75	58	185	2.40	226300
80	90	90	62	200	2.80	216901
100	110	110	68	220	3.40	216902
125	125	125	73	250	4.30	216906
125	140	140	76	250	5.00	*
150	160	160	82	285	5.70	226301

(*) consult us

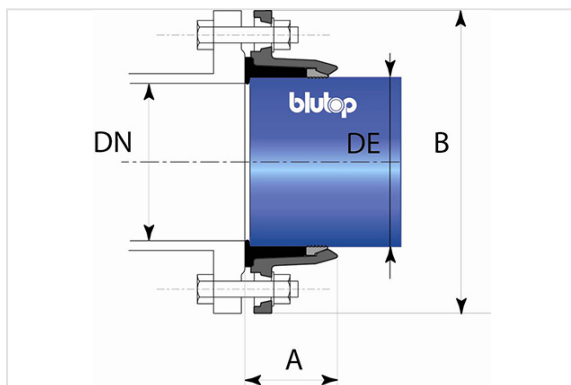

Material and coatings

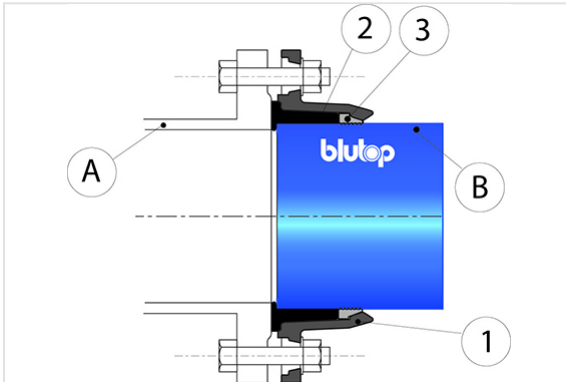

Item	Designation	Material	Coating
1	Counter-flange	GS Ductile Iron	Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
2	Tightness gasket	EPDM	
3	Locking ring	Nickel 100C6 or 16MnCr5	
A	Valve	Ductile Iron	
B	Pipe	Ductile Iron (BLUTOP)	

Marking



The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.