


## Flange Spigot ALPINAL with Fixed Flange

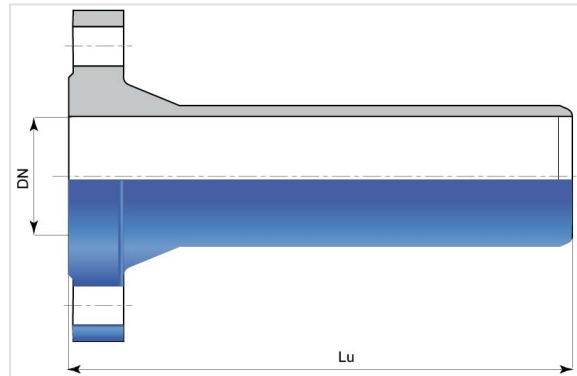

DN (mm)	Lu (mm)	PN 25		PN 40		PN 63	
		Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
100	360	11.40	BBB10BU30TT	11.40	BBB10BU30TT	15.40	ABB10BU50TT

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

## Linked products



Flanged joint with hot galvanised steel bolts, nuts and washers for ALPINAL

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*