


## Flange Spigot ALPINAL with Fixed Flange + Weld bead Ve

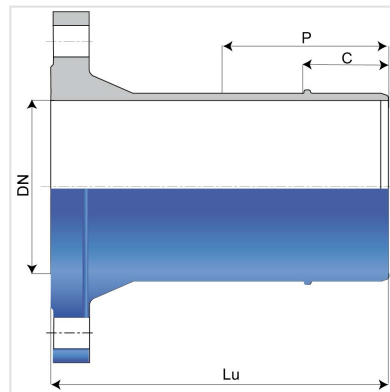

DN (mm)	Lu (mm)	PN 100		PN 16		PN 40		PN 63	
		Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
150	415	35.90	ABB15BV90TT						
150	380					21.20	BBB15BV40TT		
200	400			23.30	BBB20BV20TT	31.70	BBB20BV40TT		
200	435							50.10	ABB20BV50TT
250	455							64.70	ABB25BV50TT
250		89.00	ABB25BV90TT						
300	440					72.00	ABB30BV40TT		
400	480							178.00	ABB40BV50TT
500	490							217.00	ABB50BV50TT

### Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

### Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

## Linked products



Flanged joint with hot galvanised steel bolts, nuts and washers for ALPINAL

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*