



Duckfoot Bend 90° (1/4) ALPINAL UU - UU VE - EU and threaded 2" Gas

With Spigot threaded 2" Gas

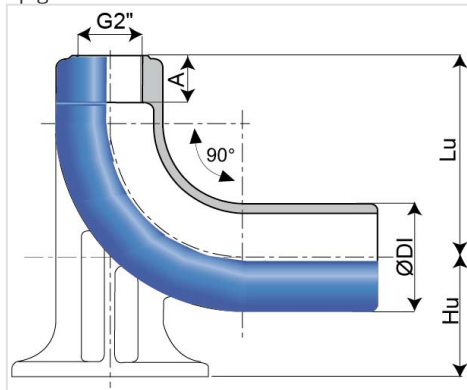

With Socket threaded 2" Gas

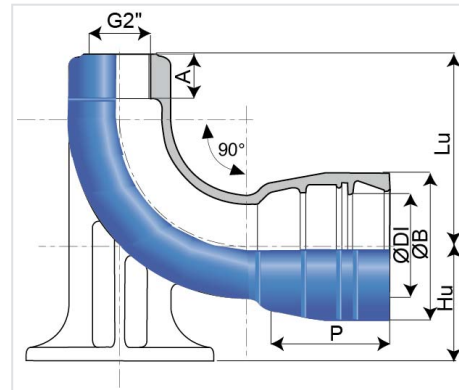

DN (mm)	Version	Lu (mm)	Hu (mm)	P (mm)	ØDI (mm)	ØB (mm)	A (mm)	Mass (kg)	References
80	Uni	180	110		97.4		35	14.10	AUA80UF0LOTT
80	Uni Ve	180	110		97.4		35	14.20	AUA80UFVLOTT
80	Socket	180	110	139	101.5	160.6	38	15.50	ANA80CF0LOTT


Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

Linked products

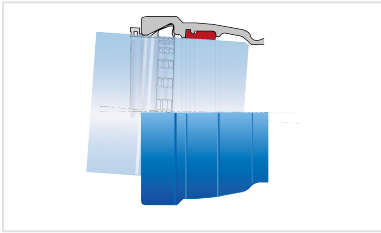

Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Vi Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.