
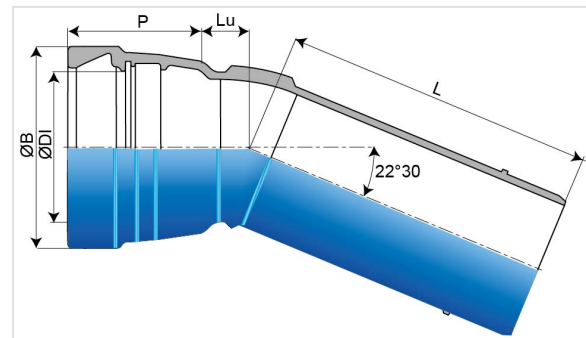


Bend ALPINAL with 1 socket UNIVERSAL TYTON and 1 spigot-end + Weld bead Ve

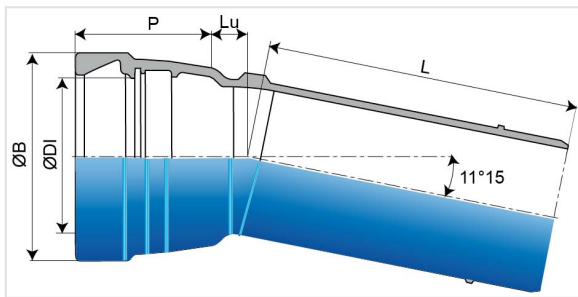

Angle	DN (mm)	Lu (mm)	L (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	100	40	313.3	143.3	121.5	177	13.90	SKB10AD00TT
11°15	100	30	303.3	143.3	121.5	177	13.50	SKB10AE00TT
22°30	150	45	349	148	173.5	230	21.90	SKB15AD00TT
11°15	150	35	339	148	173.5	230	21.40	SKB15AE00TT
22°30	200	65	384	158	225.8	290	35.00	SKB20AD00TT
11°15	200	40	359	158	225.8	290	34.90	SKB20AE00TT
22°30	250	75	407.5	165	277.3	347	52.10	SKB25AD00TT
11°15	250	50	382.5	165	277.3	347	48.60	SKB25AE00TT
22°30	300	85	430	177	329.4	405.9	75.80	SKB30AD00TT
11°15	300	55	400	177	329.4	405.9	66.50	SKB30AE00TT

Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531

Linked products



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Joint



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Vi Joint



Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.