


Flange Socket ALPINAL with socket UNIVERSAL TYTON and Fixed Flange



DN (mm)	PN	Lu (mm)	P (mm)	ØB (mm)	ØDI (mm)	Mass (kg)	References
80	10 16 25 40	130	137.2	160.6	101.5	11.30	SKA80BE10TT
100	10 16	130	143.3	177	121.5	13.20	SKB10BE10TT
100	25 40	130	143.3	177	121.5	13.70	SKB10BE30TT
125	10 16	135	142.7	201.4	147.5	15.90	SKB12BE10TT
125	25	135	142.7	201.4	147.5	16.40	SKB12BE30TT
125	40	135	142.7	201.4	147.5	17.70	SKB12BE40TT
150	10 16	135	148	230	173.5	20.50	SKB15BE10TT
150	25	135	148	230	173.5	22.20	SKB15BE30TT
150	40	135	148	230	173.5	25.00	SKB15BE40TT
200	10	140	158	290	225.8	31.20	SKB20BE10TT
200	16	140	158	290	225.8	32.00	SKB20BE20TT
200	25	140	158	290	225.8	33.00	SKB20BE30TT
200	40	140	158	290	225.8	36.20	SKB20BE40TT
250	10	145	165	347	277.3	40.50	SKB25BE10TT
250	16	145	165	347	277.3	40.20	SKB25BE20TT
250	25	145	165	347	277.3	44.00	SKB25BE30TT
250	40	145	165	347	277.3	51.60	SKB25BE40TT
300	10	150	177	405.9	329.4	55.00	SKB30BE10TT
300	16	150	177	405.9	329.4	54.60	SKB30BE20TT
300	25	150	177	405.9	329.4	62.70	SKB30BE30TT
300	40	150	177	405.9	329.4	77.70	SKB30BE40TT


Field of use:

- For connecting and water supply of snow guns
- Working networks under very high pressures


Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- Thickness of ductile iron adapted to the pressure
- Elastomer of quality EPDM
- Class : pressure class according to EN 545 and ISO 2531


Linked products

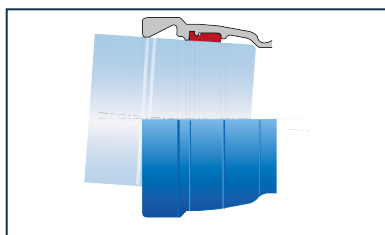

Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Joint

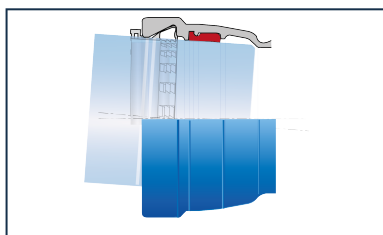

Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Vi Joint

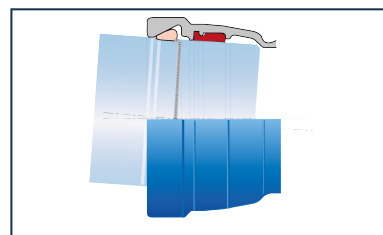

Kit ALPINAL Universal
Tyton Fitting PECB +
Universal Tyton Ve Joint

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.