


Aluminium Sleeve - Impermeable protection for Standard, TT and Universal sockets

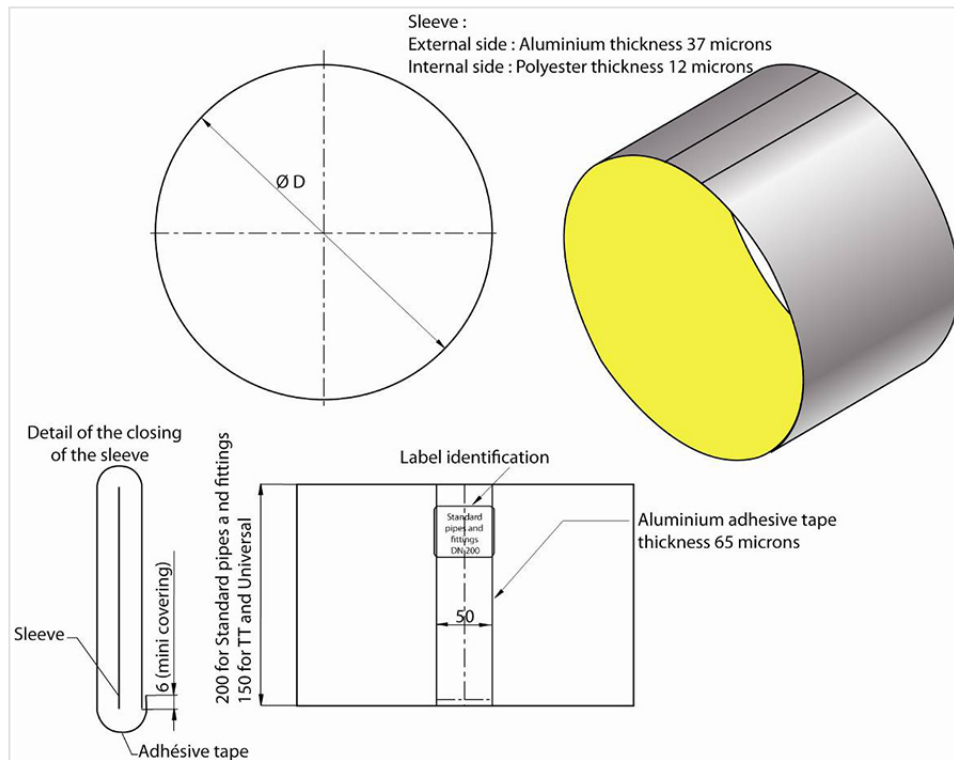

Impermeable protection for Standard, TT and Universal sockets

Attention: this aluminium sleeve requires the installation of a heat-shrinkable tubular sleeve (Raychem) to be bought separately.

DN (mm)	Ø D sleeve for Standard pipes and fittings (mm)	Ø D sleeve for TT pipes (mm)	Ø D sleeve for Universal pipes (mm)	References
100	206	186	206	212203
125	233	213	221	212207
150	260	240	248	212208
200	313	297	308	212209
250	370	352	370	212210
300	427	410	427	212211
400	534	518	528	254975
500	647	627	643	259953

DN (mm)	Ø D sleeve for Standard pipes and fittings (mm)	Ø D sleeve for TT pipes (mm)	Ø D sleeve for Universal pipes (mm)	References
600	757	738	758	242874
700	883	855	873	263951
1000	1219	1180	1210	281560

Impermeable Aluminium Tape 50 M x 75 mm : reference 212359

Related laying recommendation(s)

- [Assembly of the aluminium sleeve on Standard pipes or fittings](#)
- [Assembly of the aluminium sleeve on TT pipes](#)

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.