

## Assembling device BluJack Multi DN



The assembling device BluJack Multi DN will be used with pipes and fittings of Blutop® and Topaz® ranges DN75 to DN160 equipped with Blutop, Blutop Vi, Topaz or Topaz Vi joints.

### Equipment

- Lever with adjustable lower fork. The lever is equipped with a pivoting arm that can be retained by the pin to facilitate handling of the device.
- A strap 1000daN is included.

Version	Mass (kg)	References
BluJack Multi DN	25.00	246471


### Assembling procedure



1-




1-

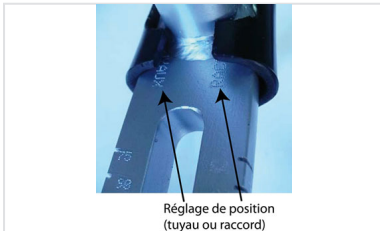


1-


1. Adjusting the spacing of the fork on the position of the diameter concerned (behind the socket). Tighten using a wrench 24.
2. Encircle the barrel of the pipe with the supplied strap, loosely.
3. Set up the device by setting the fork straight behind the socket of the fitting (or pipe).
4. Attach the strap A, keeping the vertical lever B, tighten the strap C in order to strangle the pipe.
5. Actuate the lever as indicated D and perform the assembly, ensuring that the fitting (or the pipe) fits well. Deflect if necessary after assembly (deflection of 6° is possible).
6. Check the correct position of the seal with the ruler provided in the box of the Blutop<sup>®</sup> or Topaz<sup>®</sup> joint.

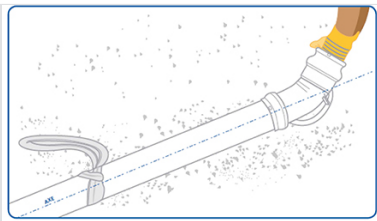


2-

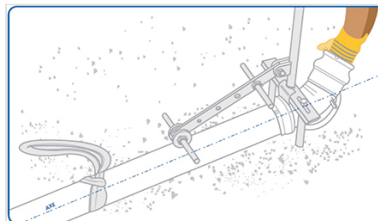


2-

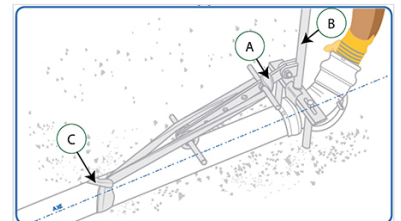

3-

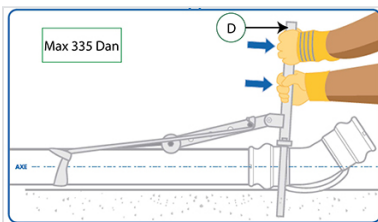


4-



5-

**Disassembling procedure**

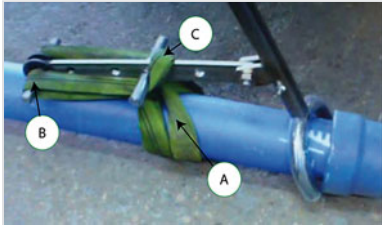

1- 2- 3-




4-



- Set up the fork of the device in front of the socket of the fitting (or pipe) to disassemble.
- Encircle the barrel of the pipe A with the provided strap.
- Pass the strap under the ladder B then tie C.
- Push the lever in the direction of the pipe to disassemble.

**Details**

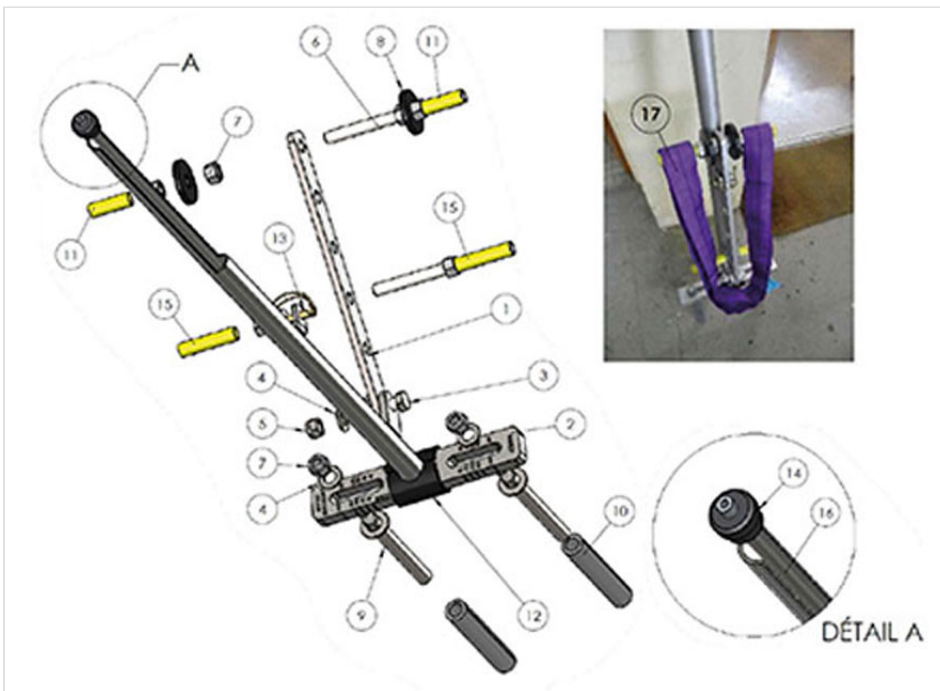

Item	Quantity	Description	Detail
1	1	Arm	
2	1	Lever	
3	1	Screw TH M16 x 50	
4	3	Washers "M" Ø16	

Item	Quantity	Description	Detail
5	1	Brake nut M16 (Nylstop)	
6	2	Threaded shaft M16 Lg.200	
7	8	Nut HM16	
8	2	Thrust washer	
9	2	Cleat	
10	2	Protective sheath Lg. 160	PVC tube TUBCLAIR 19x26
11	2	Rod sheath Lg. 57mm	Watering hose DN15
12	1	Protection tube	PE pipe Ø50 x 5
13	1	Pin rod	Ø10 x 60 ½ moon
14	1	Rubber tip with ankle	Tip for pipe
15	2	Rod sheath Lg. 80mm	Watering hose DN15
16	1	Threaded shaft M8 Lg. 1m	Storing the spare protective sheath
17		Strap	CMU 1000kg purple (table)

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*