


Bend 90° (1/4) (PECB) with 2 Fixed Flanges

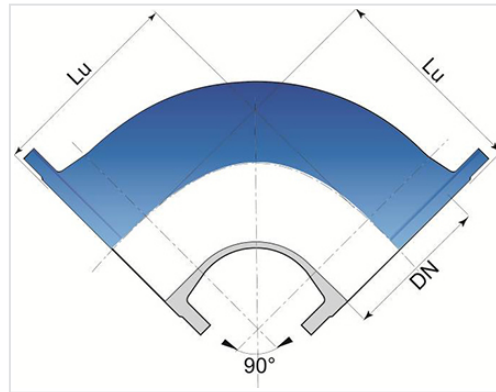

Angle	DN (mm)	Lu (mm)	PN 10		PN 16		PN 25		PN 40	
			Masse (kg)	References	Masse (kg)	References	Masse (kg)	References	Masse (kg)	References
90°	50	150	6.40	BBA50CA10TT	6.40	BBA50CA10TT	6.40	BBA50CA10TT	6.40	BBA50CA10TT
90°	80	165	9.70	BBA80CA10TT	9.70	BBA80CA10TT	9.70	BBA80CA10TT	9.70	BBA80CA10TT
90°	100	180	12.00	BBB10CA10TT	12.00	BBB10CA10TT	13.00	BBB10CA30TT	13.00	BBB10CA30TT
90°	125	200	15.50	BBB12CA10TT	15.50	BBB12CA10TT				
90°	150	220	22.60	BBB15CA10TT	22.60	BBB15CA10TT	22.00	BBB15CA30TT	22.00	BBB15CA30TT
90°	200	260	31.00	BBB20CA10TT	31.00	BBB20CA20TT				
90°	250	350	49.90	BBB25CA10TT	49.90	BBB25CA20TT	57.00	BBB25CA30TT		
90°	300	400	66.00	BBB30CA10TT	69.50	BBB30CA20TT	74.50	BBB30CA30TT		
90°	350	450	104.00	BBB35CA10TT	96.00	BBB35CA20TT				
90°	400	500	121.00	BBB40CA10TT	121.00	BBB40CA20TT	164.00	BBB40CA30TT		
90°	450	550	207.00	BBB45CA10TT	221.00	BBB45CA20TT	239.00	BBB45CA30TT		
90°	500	600	265.00	BBB50CA10TT	287.00	BBB50CA20TT				
90°	600	700	388.00	BBB60CA10TT	431.00	BBB60CA20TT	453.00	BBB60CA30TT		
90°	700	800	564.00	BBB70CA10TT	561.00	BBB70CA20TT	640.00	BBB70CA30TT		
90°	800	900	782.00	BBB80CA10TT	778.00	BBB80CA20TT	886.00	BBB80CA30TT		
90°	900	1000	1030.00	BBB90CA10TT	1025.00	BBB90CA20TT	1154.00	BBB90CA30TT		
90°	1000	1100	1354.00	BBC10CA10TT	1348.00	BBC10CA20TT				
90°	1200	1355	2552.00	BBC12CA10TT	2625.00	BBC12CA20TT	2745.00	BBC12CA30TT		

Field of use:

- For drinking water networks

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products



Flanged joint with hot galvanized steel bolts, nuts and washers

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.