


Flange Spigot NATURAL with Rotatable Flange

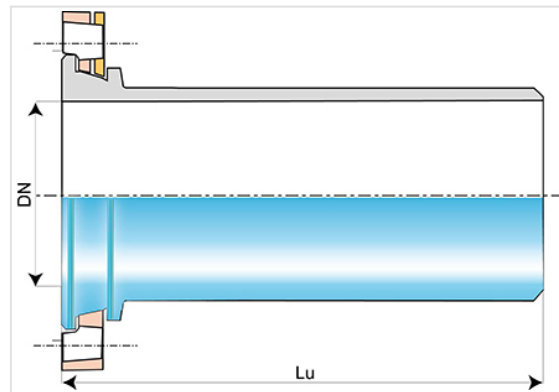

DN (mm)	Lu (mm)	PN 10		PN 16		PN 25		PN 40	
		Mass (kg)	References	Mass (kg)	References	Mass (kg)	References	Mass (kg)	References
60	350	5.57	NEA60BU10NN2	5.57	NEA60BU10NN2	5.60	NEA60BU30NN2	5.60	NEA60BU30NN2
80	350	7.47	NEA80BU10NN2	7.47	NEA80BU10NN2	7.47	NEA80BU10NN2	7.47	NEA80BU10NN2
100	350	7.86	NEB10BU10NN2	7.86	NEB10BU10NN2	9.06	NEB10BU30NN2	9.06	NEB10BU30NN2
125	350	10.11	NEB12BU10NN2	10.11	NEB12BU10NN2	11.78	NEB12BU30NN2	11.78	NEB12BU30NN2
150	400	12.92	NEB15BU10NN2	12.92	NEB15BU10NN2	14.96	NEB15BU30NN2	14.96	NEB15BU30NN2
200	400	20.60	NEB20BU10NN2	20.50	NEB20BU20NN2	22.00	NEB20BU30NN2		
250	400	29.52	NEB25BU10NN2	29.12	NEB25BU20NN2	32.02	NEB25BU30NN2		
300	450	38.80	NEB30BU10NN2	38.10	NEB30BU20NN2	41.70	NEB30BU30NN2		


Field of use:

- For drinking water networks
- The scope of use of Aquacoat® fittings in soils is equivalent to that of Natural Biozinalium® pipes, it is suitable for the majority of soils, as defined in appendix D.2.2 of standard EN545:2010. exception :
 - peaty and acidic soils
 - soils containing waste, ashes, slag or contaminated by certain waste or industrial effluents
 - soils located below the level of the marine water table having a resistivity less than 500 Ω cm
- In such soils, or in other aggressive environments, or in the event of stray currents, it is recommended to use other, more suitable types of coatings.

Main characteristics:

- Inside-Outside coating: Aquacoat fittings (AQB) without Bisphenol
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

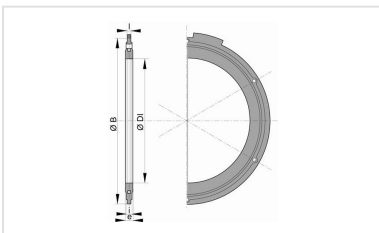

Flanged joint with
metallized steel bolts and
nuts

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.