


## Standard gasket for Pipes and Fittings DN60-2000

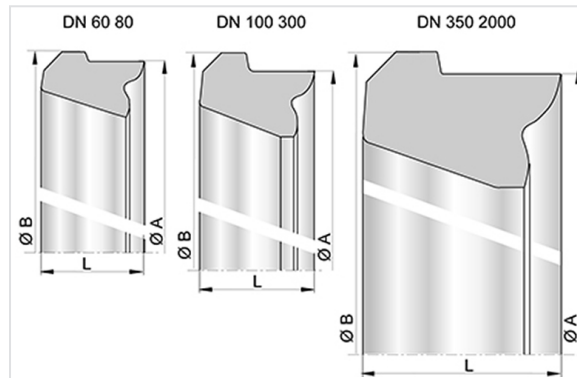

The STANDARD gasket is compatible with the whole STANDARD sockets for pipes and fittings from water and irrigation ranges.

The STANDARD gasket is a push-on joint. The watertightness is made by the compression of the elastomer gasket which operates during the assembling by the introduction of the spigot end inside the socket.

DN (mm)	L (mm)	ØA (mm)	ØB (mm)	Mass (kg)	References
60	28.7	105.6	110.6	0.11	JSA60BA
80	29.8	127.5	135.7	0.15	JSA80BA
100	29.8	148.6	158.6	0.20	JSB10BA
125	30.6	175.7	185.7	0.24	JSB12BA
150	30.6	202.1	212.1	0.29	JSB15BA
200	31.7	250.5	260.5	0.38	JSB20BA
250	32.6	303.5	313.5	0.50	JSB25BA
300	35.9	359.5	369.5	0.71	JSB30BA
350	37.8	414	422	0.90	JSB35BA
400	38.8	466.5	474.5	1.08	JSB40BA
450	40.7	519.8	527.8	1.32	JSB45BA
500	41.8	573.4	581.4	1.54	JSB50BA
600	45	680.2	690.2	2.16	JSB60BA
700	48.2	787.6	797.6	2.87	JSB70BA
800	51.4	895.4	905.4	3.67	JSB80BA
900	54.6	1002.3	1012.3	4.61	JSB90BA
1000	57.8	1109.1	1119.1	5.59	JSC10BA
1100	65.1	1218.5	1229.5	7.68	JSC11BA

DN (mm)	L (mm)	ØA (mm)	ØB (mm)	Mass (kg)	References
1200	68.2	1326.2	1338.2	9.34	JSC12BA
1400	81.6	1546.4	1554.9	15.49	JSC14BA
1500	89.2	1656.6	1675.6	19.77	JSC15BA
1600	89.2	1761.4	1780.4	21.05	JSC16BA
1800	96.6	1977	1998	27.72	JSC18BA
2000	104.6	2204.8	2226.8	29.00	JSC20BA

### Field of use:

- For drinking water networks

### Main characteristics:

- Elastomer quality : EPDM
- Quick and easy installation
- Possible axial play
- High coefficient security beyond the PFA
- High angular deflection possible

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*