


Kit Standard TT PE Pipe with notches + Standard SUREJOINT (CONTROL+) Gasket

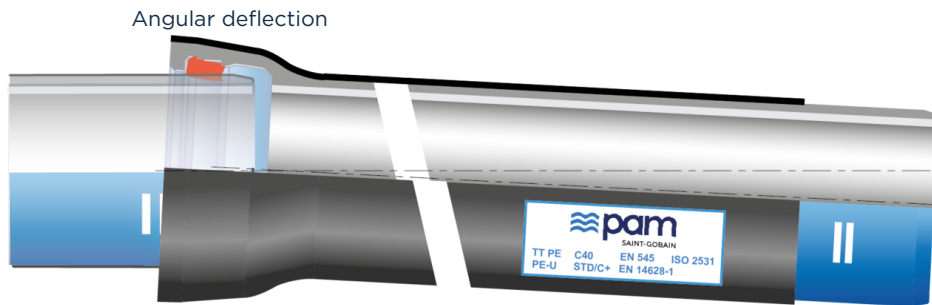


DN (mm)	Class	Angular deflection	PFA	References
150	C40	5 °	40 bar	SSB15Q60AGV-E07
200	C40	5 °	40 bar	SSB20Q60AGV-E07
250	C40	5 °	40 bar	SSB25Q60AGV-E07
300	C40	5 °	40 bar	SSB30F60AGV-E07
350	C30	4 °	30 bar	SSB35G60AGV-E07
400	C30	4 °	30 bar	SSB40G60AGV-E07
450	C30	4 °	30 bar	SSB45G60AGV-E07
500	C30	4 °	30 bar	SSB50G60AGV-E07
600	C30	4 °	30 bar	SSB60G60AGV-E07

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar


Accessories



Elastomer Sleeve TT PE -
Protection of joints of
pipes and fittings DN60
to 300

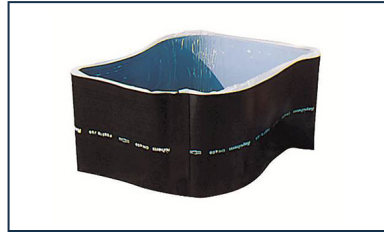


Heat-shrink Collar for TT
PE Standard and
Universal

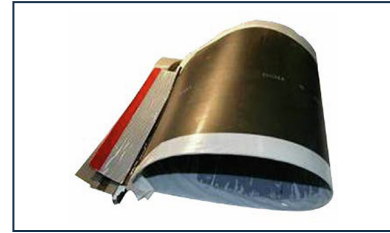


Heat-shrink Collar for TT
PE Standard et Universal
- Roll

Linked products

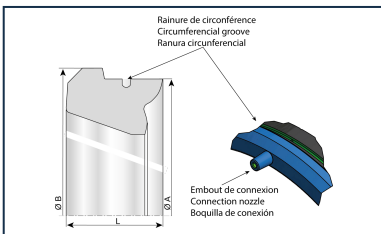

Gasket STANDARD
rubber water EPDM
SUREJOINT (CONTROL+)
equipped with valve

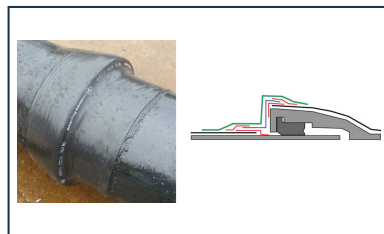

Assembly of the
aluminium sleeve on TT
pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.