


STD Vi gasket for Pipes and Fittings DN60-700

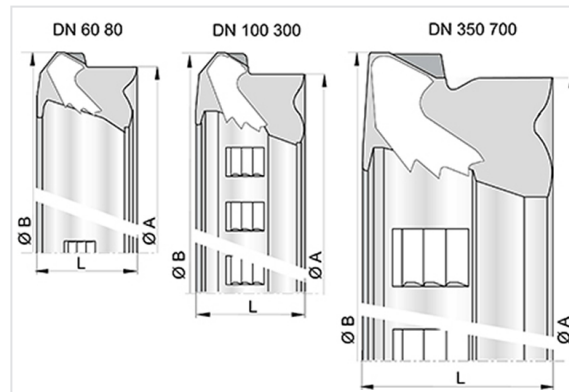

The anchored STANDARD Vi gasket (with inserts) has the same shape than the STANDARD gasket, and fits the same socket. The STANDARD Vi gasket has inserts which anchor the socket joint by hooking into the pipe spigot (or the fitting) after the assembling.

DN (mm)	L (mm)	ØA (mm)	ØB (mm)	Mass (kg)	References
60	27.3	105.6	113.8	0.16	JSA60CA
80	27.2	122.9	131.7	0.21	JSA80CA
100	27.1	143.8	154.8	0.28	JSB10CA
125	28	170.7	181.7	0.33	JSB12CA
150	28.8	197.7	208.5	0.44	JSB15DA
200	28.4	250.5	261.9	0.62	JSB20DA
250	31	303.5	314.9	0.85	JSB25DA
300	35	359.5	371.1	1.31	JSB30CA
350	34.5	414	424	1.57	JSB35CA
400	35.8	466.5	476.5	1.84	JSB40CA
450	37.5	519.8	529.8	2.35	JSB45CA
500	38.5	573.4	583.4	2.71	JSB50CA
600	41	680.2	691	3.78	JSB60CA
700	44	787.6	798.8	3.90	JSB70CA

Field of use:

- For drinking water networks

Main characteristics:

- Elastomer quality : EPDM
- Quick and easy installation
- Possible axial play
- High coefficient security beyond the PFA
- High angular deflection possible

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.