


Kit Standard TT PE Pipe with notches + Standard Vi Gasket

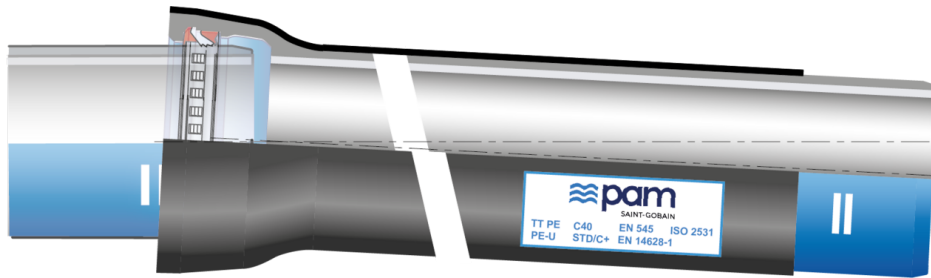


DN	Class	Angular deflection	PFA	References
150	C40	5 °	16 bar	SSB15Q60AGV-E06
200	C40	4 °	16 bar	SSB20Q60AGV-E06
250	C40	4 °	16 bar	SSB25Q60AGV-E06
300	C40	3 °	16 bar	SSB30F60AGV-E06
350	C30	3 °	16 bar	SSB35G60AGV-E06
400	C30	2 °	16 bar	SSB40G60AGV-E06
450	C30	2 °	13 bar	SSB45G60AGV-E06
500	C30	2 °	11 bar	SSB50G60AGV-E06
600	C30	2 °	10 bar	SSB60G60AGV-E06

- DN60 to 300 : Reference pipe + joint + Elastomer Sleeve
- DN350 to 700 : Reference pipe + joint + Heat-shrink Collar

Accessories



Elastomer Sleeve TT PE -
Protection of joints of

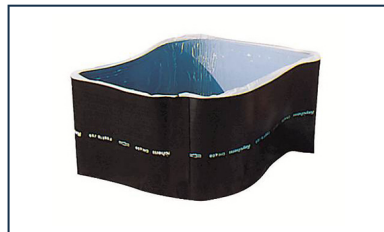


Heat-shrink Collar for TT
PE Standard and
Universal


Last Update 24/06/2026
Visit website for latest version

pipes and fittings DN60
to 300

Linked products

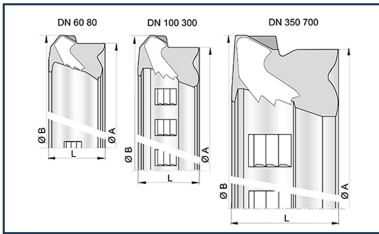

STD Vi gasket for Pipes
and Fittings DN60-700

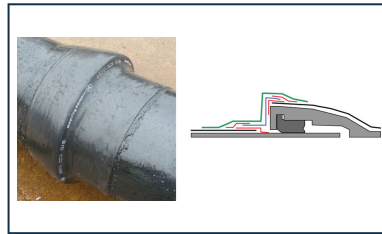

Assembly of the
aluminium sleeve on TT
pipes

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.