


Bend 22°30 (1/16) (PECB) with 2 sockets EXPRESS

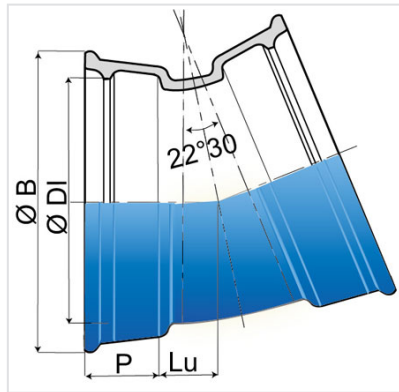

Angle	DN (mm)	Lu (mm)	P (mm)	ØDI (mm)	ØB (mm)	Mass (kg)	References
22°30	80	32	79	101.4	167.5	4.83 kg	293380
22°30	100	35	80	121.4	187.5	5.66 kg	293379
22°30	125	40	83	147.4	214.5	7.10 kg	293381
22°30	150	45	86	173.4	241.5	8.80 kg	291951
22°30	200	55	92	225.5	294.5	13.00 kg	291952
22°30	350	78	110	381.9	462	44.31 kg	SEB35CD00TT2
22°30	400	92	110	432.9	514	57.90 kg	SEB40CD00TT2
22°30	450	101	120	484	575.4	73.19 kg	SEB45CD00TT2
22°30	500	110	120	536	627	96.50 kg	SEB50CD00TT2
22°30	600	128	135	639.1	736.3	138.60 kg	SEB60CD00TT2
22°30	700	157.5	150	742	861	232.00 kg	SEB70CD00TT
22°30	800	170.5	160	846	972	305.00 kg	SEB80CD00TT
22°30	1000	217.5	145	1052	1189	459.00 kg	SEC10CD00TT


Field of use:

- For drinking water and irrigation networks
- For aggressive soils (maritime soils, peaty, ...)

Main characteristics:

- External and internal coating : Blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)
- In conformity with EN 545:2010 and ISO 2531:2009

Linked products

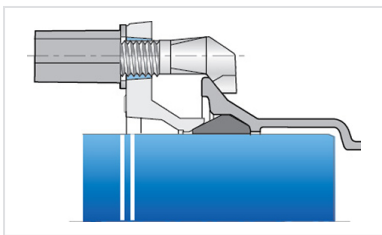

Kit Express Fittings PECB +
Express Gasket



Kit Express Fitting PECB +
Express Vi Gasket

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.